

Tajima

2024



Since 1909

Tajima 2024 LINE UP

LAYOUT TOOLS
Pg. 80-82

LED-LIGHTS
Pg. 40-45

DRYWALL TOOLS
Pg. 47-52



MARKING TOOLS
Pg. 10-18



UTILITY KNIVES & BLADES
Pg. 54-67

MEASURING TAPES

Pg. 28-38

CAULK GUNS

Pg. 20-26

Tajima

Tajima



SCRAPERS
Pg. 68

PULL-STROKE SAWS
Pg. 70-78

Ideal Retail Display



Tajima



H : 89.7 in
(228 cm)

W : 41.3 in
(105 cm)

D : 16.5 in
(42 cm)

TAJIMA POP DISPLAY

BACKER BOARD



W : 39.4 in (100 cm)

ITEM CODE : BBP-CR-08

H : 15.7 in
(40 cm)



W : 39.4 in (100 cm)

ITEM CODE : BBP-MT-03

H : 7.5 in
(19 cm)



W : 41.3 in (105 cm)

ITEM CODE : BBP-MT-02

H : 7.5 in
(19 cm)



W : 41.3 in (105 cm)

ITEM CODE : BBP-MT-01

H : 7.5 in
(19 cm)



W : 17.7 in (45 cm)

H : 9.8 in (25 cm)



W : 27 in (68 cm)

H : 15 in (39 cm)



W : 39.4 in (100 cm)

H : 12.3 in (31 cm)



W : 39.4 in (100 cm)

H : 13.8 in (35 cm)

TAJIMA TOP BOARD



H : 6.3 in (16 cm)

W : 23.6 in (60 cm)

ITEM CODE : Tajima POP

TAJIMA POP DISPLAY

STICKERS & HOOKS



ITEM CODE : CNVHOOK



ITEM CODE : CNVHOOK2



ITEM CODE (From the left):

- 1st stage CNVST-RS, CNVST-SP26, CNVST-SP18, CNVST-SP, CNVST-PL2, CNVST-LT
- 2nd stage CNVST-RS/J, CNVST-SP26/J, CNVST-SP18/J, CNVST-SP/J, CNVST-PL2/J

COUNTER TOP DISPLAY



H : 32.3 in
(82 cm)

D : 13.8 in
(35 cm)

D : 13.8 in
(35 cm)















ITEM CODE : TRIG-02
TRIG-HOOK
TRIG-STK-Y

MARKING TOOLS



MARKING TOOLS



LINE THICKNESS	0.02 in (0.5 mm) Ultra Thin™ 0.5mm	0.04 in (1.0 mm) Extra Bold™ 1.0mm	0.07 in (1.8 mm) 1.8mm Extreme Bold™	0.1 in (2.8 mm) 2.8mm Maximum Bold™				
LINE LENGTH								
150 ft (45 m)				CR604S Pg. 11 				
100 ft (30 m)	CR402S Pg. 12 	CR302JF Pg. 12 	CR202B-P Pg. 13 	CR301JF Pg. 12 	CR201R-PR/W-P Pg. 13 	CR401S Pg. 12 	CR503S Pg. 11 	
50 ft (15 m)				CR403S Pg. 11 				
23 ft (7 m)			CR101S-0 Pg. 13 					
REPLACEMENT SNAP LINE	Ultra Thin™ 0.5mm PL-ITOS Pg. 14 	Extra Bold™ 1.0mm PL-ITOL Pg. 14 	1.8mm Extreme Bold™ PL-ITOLL Pg. 14 	2.8mm Maximum Bold™ PL-ITO3L Pg. 14 				

MARKING TOOLS

CHALK-RITE® DURA III



- Specially crafted woven snap line creates Maximum Bold 0.1 in (2.8 mm) lines
- Holds up to 25 oz (709 g) chalk
- Large, leak-proof refill port
- Ergonomically designed shock-resistant case with a heavy-duty aluminum front plate
- Double-speed winding mechanism

ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR604S	0.1 in (2.8 mm) x 150 ft (45 m)	DOUBLE-SPEED WINDING MECHANISM	1	12	0-49296-05830-2

CHALK-RITE® DURA / DURA II (CR403S) (CR503S)



CR403S

CR503S

- Premium braided snap line creates Extreme Bold 0.07 in (1.8 mm) lines
- Holds 2x more chalk than the Extra Bold Snap Line marking tools
- Heavy-duty aluminum case integrated with non-slip grip surface
- Large refill port also allows for convenient felt replacement



Integrated handle release™
Die-cast aluminum Case™



ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR403S	0.07 in (1.8 mm) x 50 ft (15 m)	FASTWIND SYSTEM	4	24	0-49296-05774-9
CR503S	0.07 in (1.8 mm) x 100 ft (30 m)	FASTWIND SYSTEM			0-49296-05775-6

MARKING TOOLS

CHALK-RITE® DURA



CR401S

CR402S

- Premium braided line creates an Extra Bold 0.04 in (1.0 mm) line (CR401S)
- Produces clear and Ultra Thin 0.02 in (0.5 mm) line for finish carpentry (CR402S)
- Heavy-duty aluminum case integrated with non-slip grip surface
- Large gasket-sealed refill port



ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR401S	0.04 in (1.0 mm) x 100 ft (30 m)	FASTWIND SYSTEM	4	24	0-49296-05740-4
CR402S	0.02 in (0.5 mm) x 100 ft (30 m)				0-49296-05884-5

CHALK-RITE® JAM FREE



CR301JF

CR302JF

- Jam-free braided line creates Extra Bold 0.04 in (1.0 mm) lines (CR301JF)
- Produces clear and Ultra Thin 0.02 in (0.5 mm) line for finish carpentry (CR302JF)
- Durable ABS case with large refill port
- Smooth-running five-gear winding mechanism



ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR301JF	0.04 in (1.0 mm) x 100 ft (30 m)	TOUGH FIVE GEAR DRIVE	8	32	0-49296-05647-6
CR302JF	0.02 in (0.5 mm) x 100 ft (30 m)				0-49296-05883-8

MARKING TOOLS

CHALK-RITE® II EXTRA BOLD

- Premium braided line creates Extra Bold 0.04 in (1.0 mm) lines (CR201R-PR / CR201W-P)
- Specially crafted braided line creates Ultra-Thin 0.02 in (0.5 mm) lines (CR202B-P)
- Large gasket-sealed refill port
- Heavy-duty aluminum case
- Smooth-running five-gear winding mechanism



CR201R-PR

CR201W-P

CR202B-P



ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR201R-PR	0.04 in (1.0 mm) x 100 ft (30 m)	TOUGH FIVE GEAR DRIVE	4	24	0-49296-05621-6
CR201W-P					0-49296-05678-0
CR202B-P	0.02 in (0.5 mm) x 100 ft (30 m)				0-49296-05593-6

CHALK-RITE® AUTO WIND

- Premium braided snap line creates Extra Bold 0.04 in (1.0 mm) lines
- Automatic winding mechanism
- Unique see-through canister and chalk metering sleeve




ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
CR101S-0	0.04 in (1.0 mm) x 23 ft (7 m)	AUTO WIND	6	36	0-49296-05484-7

MARKING TOOLS

CHALK-RITE® REPLACEMENT LINE

• Premium braided nylon line for Chalk-Rite marking tools

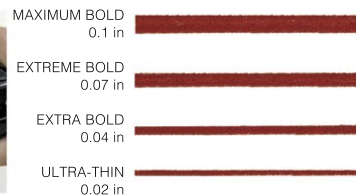

ITEM CODE	LINE LENGTH	LINE THICKNESS	CASE	MASTER CARTON	UPC
PL-IT03L	0.1 in (2.8 mm) x 150 ft (45 m)	MAXIMUM BOLD	1	20	0-49296-05835-7
PL-ITOLL	0.07 in (1.8 mm) x 100 ft (30 m)	EXTREME BOLD	10	100	0-49296-05782-4
PL-ITOL	0.04 in (1.0 mm) x 100 ft (30 m)	EXTRA BOLD			0-49296-05435-9
PL-ITOS	0.02 in (0.5 mm) x 100 ft (30 m)	ULTRA-THIN			0-49296-05434-2

MARKING TOOLS

CHALK LINE REPLACEMENT PARTS COMPATIBILITY TABLE

CHALK LINE	 CR503S Pg. 11	 CR403S Pg. 11	 CR401S Pg. 12	 CR402S Pg. 12	 CR301JF Pg. 12	 CR302JF Pg. 12	 CR202B-P Pg. 13	 CR201R-PR Pg. 13	 CR201W-P Pg. 13
REPLACEMENT PARTS									
TAJ-EH09 	✓	✓	✓	✓	✓	✓	✓	✓	✓
TAJ-CSDR 	✓	✓	✓	✓			✓	✓	✓
TAJ-HN09 					✓	✓	✓	✓	✓
TAJ-G009 					✓	✓	✓	✓	✓
TAJ-CP10 	✓	✓	✓	✓	✓	✓	✓	✓	✓
TAJ-GS09 					✓	✓	✓	✓	✓
TAJ-LL09 							✓	✓	✓
TAJ-LS09 							✓	✓	✓
TAJ-NTSBTS 							✓	✓	✓
TAJ-SPDR 	✓	✓	✓	✓					
TAJ-PTDR 	✓	✓	✓	✓					
TAJ-HNDR 	✓	✓	✓	✓					
TAJ-LSDR 		✓	✓	✓					

MARKING TOOLS

Permanency of TAJIMA Chalk

Permanency Level Chalk Series	1	2	3	4	5
	Standard	High-Visibility	Semi-Permanent	Permanent	Ultimate Permanency
SNAP LINE DYE	–	–	–	 DARK WHITE / DARK BLUE BLACK	 DARK RED
MICRO CHALK	 WHITE	 YELLOW / BLUE	 RED	–	–
FLUORESCENT MICRO CHALK	 GREEN	 YELLOW / BLUE / PINK		–	–
Best for	Interior	Interior / Exterior	Exterior		
Applications	<ul style="list-style-type: none"> • Remodeling • Interior Trim • Interior Decorating • Cabinet Installation 	<ul style="list-style-type: none"> • Roofing • Siding • Paneling • Interior Layout 	<ul style="list-style-type: none"> • Corrections • Plumbing / Electrical • Roofing • Masonry 	<ul style="list-style-type: none"> • Exterior Layout • Concrete Layout • Roofing • Steel & Metal Fabrication 	<ul style="list-style-type: none"> • Exterior Layout • Concrete Layout • Extreme Conditions • Long Term Applications
Benefits	<ul style="list-style-type: none"> • Eliminates need for priming before painting • Wipes off smooth and rough surfaces with a cloth cleanly 	<ul style="list-style-type: none"> • Temporary marking-chalk • Provides great visibility • Use to show layout changes and corrections 	<ul style="list-style-type: none"> • For semi-permanent marking projects • Use to show layout changes and corrections 	<ul style="list-style-type: none"> • Weather resistant lines remain visible after weeks of weather, sun and jobsite wear and tear 	<ul style="list-style-type: none"> • Weatherproof lines reduces the need for spraying a sealant on snapped lines • Stains surfaces



MARKING TOOLS

SNAP LINE DYE



• Ultra-fine powdered chalk for semi-permanent marking tasks

ITEM CODE	WEIGHT	COLOR	CASE	MASTER CARTON	UPC
PLC3-BK300	10.5 oz. / 300 g	Black	6	60	0-49296-05590-5
PLC3-DR300		Red			0-49296-05589-9
PLC3-DW300		White			0-49296-05776-3
PLC3-DB300		Blue			0-49296-05777-0
PLC3-BK900	32 oz. / 907 g	Black	24	6	0-49296-05718-3
PLC3-DR900		Red			0-49296-05716-9
PLC3-DW900		White			0-49296-05847-0
PLC3-DB900	Blue	0-49296-05848-7	2	6	0-49296-05833-3
PLC3-BK2700	Black	0-49296-05834-0			
PLC3-DR2700	Red	0-49296-05849-4			
PLC3-DB2700	Blue	0-49296-05850-0			

MICRO CHALK



• Coats the line evenly and thoroughly for bold, uniform lines

ITEM CODE	WEIGHT	COLOR	CASE	MASTER CARTON	UPC
PLC2-B300	10.5 oz. / 300 g	Blue	6	60	0-49296-05511-0
PLC2-R300		Red			0-49296-05512-7
PLC2-W300		White			0-49296-05510-3
PLC2-Y300		Yellow			0-49296-05513-4
PLC2-B900	32 oz. / 907 g	Blue	24	6	0-49296-05717-6
PLC2-R900		Red			0-49296-05715-2
PLC2-W900		White			0-49296-05841-8
PLC2-Y900	Yellow	0-49296-05842-5	2	6	0-49296-05843-2
PLC2-B2700	Blue	0-49296-05844-9			
PLC2-R2700	Red	0-49296-05845-6			
PLC2-W2700	White	0-49296-05846-3			

FLUORESCENT MICRO CHALK



• Fluorescent colors for superior visibility


ITEM CODE	WEIGHT	COLOR	CASE	MASTER CARTON	UPC
PLC2-FG300	10.5 oz. / 300 g	Green	6	60	0-49296-05778-7
PLC2-FY300		Yellow			0-49296-05779-4
PLC2-FB300		Blue			0-49296-05780-0
PLC2-FP300		Pink			0-49296-05781-7
PLC2-FG900	32 oz. / 907 g	Green	24	6	0-49296-05851-7
PLC2-FY900		Yellow			0-49296-05852-4
PLC2-FB900		Blue			0-49296-05853-1
PLC2-FP900	Pink	0-49296-05854-8	2	6	0-49296-05855-5
PLC2-FG2700	Green	0-49296-05856-2			
PLC2-FY2700	Yellow	0-49296-05857-9			
PLC2-FB2700	Blue	0-49296-05858-6			

MARKING TOOLS

INK-RITE®



- Precision snap line uses ink to create bold, permanent lines
- Automatic winding mechanism



ITEM CODE	LINE LENGTH	WINDING CONTROL	CASE	MASTER CARTON	UPC
IR101S-0	0.02 in (0.6 mm) x 25 ft (7.5 m)	AUTO WIND	6	36	0-49296-05461-8



QUICK DRY INK



PSB2-180

PSS2-180

- Snap line ink ideal for permanent dry surface marking
- Spill-proof nozzles

ITEM CODE	WEIGHT	COLOR	CASE	MASTER CARTON	UPC
PSB2-180	6 fl. oz. / 180 ml		3	60	0-49296-05408-3
PSS2-180					0-49296-05409-0

INK-RITE® REPLACEMENT LINE

- Premium braided nylon line for the Ink-Rite marking tool



ITEM CODE	LINE LENGTH	CASE	MASTER CARTON	UPC
PS-ITOS	0.02 in (0.6 mm) x 130 ft (40 m)	10	100	0-49296-05432-8

INK-RITE® REPLACEMENT SPONGE























ITEM CODE	CASE	MASTER CARTON	UPC
M21-WAT	1	100	0-49296-05464-9

CAULK GUNS



CAULK GUNS

SPECIFICATIONS AND FUNCTIONS TABLE

CONVOY SERIES		CARTRIDGE SIZE	WEIGHT	MATERIALS		FUNCTIONS	THRUST SYSTEMS	THRUST RATIO	VISCOSITY
				BARRELS	GRIPS				
CONVOY® SUPER 26 DUO™ Pg. 21		22 fl. oz. / 650 ml 16 fl. oz. / 450 ml	58 oz. / 1,650 g	Metal	Metal	—	TT System	26 : 1	
CONVOY® SUPER 26 SAUSAGE GUN 2WAY™ Pg. 22		10 fl. oz. / 300 ml	39 oz. / 1,100 g	Metal	Metal	360° RH	Enhanced SST	26 : 1	
CONVOY® SUPER SAUSAGE GUN 2WAY™ Pg. 22		20 fl. oz. / 600 ml	35 oz. / 990 g	Metal	Metal • Resin	360° RH AFS System	TT System	12 : 1	
CONVOY® BULK SUPER 3WAY™ Pg. 23		10 fl. oz. / 300 ml	42 oz. / 1,200 g	Aluminum	Aluminum	360° RH	Enhanced SST	10 : 1	
CONVOY® RS™ Pg. 23		10 fl. oz. / 300 ml	26 oz. / 740 g	Metal	Resin	360° RH	DP Enhanced SST	8 : 1	
		30 fl. oz. / 900 ml	33 oz. / 940 g					16 : 1	
CONVOY® SUPER™ 26 Pg. 24		10 fl. oz. / 300 ml	25 oz. / 710 g	Metal	Metal • Resin	360° RH	Enhanced SST	26 : 1	
		30 fl. oz. / 900 ml	35 oz. / 1,005 g						
CONVOY® SUPER™ 18 Pg. 24		10 fl. oz. / 300 ml	25 oz. / 710 g	Metal	Metal • Resin	360° RH	Enhanced SST	18 : 1	
		30 fl. oz. / 900 ml	35 oz. / 1,005 g						
CONVOY® SUPER™ Pg. 25		10 fl. oz. / 300 ml	25 oz. / 710 g	Metal	Metal • Resin	360° RH AFS System	TT System	12 : 1	
		30 fl. oz. / 900 ml	35 oz. / 1,005 g						
CONVOY® PLUS II™ Pg. 25		10 fl. oz. / 300 ml	21 oz. / 605 g	Metal	Resin	360° RH AFS System	TT System	7 : 1	
		30 fl. oz. / 900 ml	32 oz. / 900 g						
CONVOY® LITE™ Pg. 26		10 fl. oz. / 300 ml	17 oz. / 480 g	Resin	Resin	AFS System	TT System	7 : 1	


THRUST SYSTEM



DP Dual Power™
Pull the lever down for hard materials, press up for soft materials. In the down position, thrust force is increased by about 40%.




Enhanced SST
Enhanced SST™
With a 20% larger contact surface area between plunger and valve plate, there is no loss in thrust force.



TT System
Twin Thrust System™
The four-point system strengthens thrust force on the plunger. This means it can be used with ease, even with hard materials.

FUNCTIONS

360° RH
360° Rotating Handle™
Ideal for maneuvering in and around tight spaces.



AFS System
Auto Flow Stop System™
Plunger retracts a few millimeters after every push, efficiently stopping flow.




CAULK GUNS



Convoy® Super 26 DUO™



- For dual component adhesive cartridges
- Compatible with 1:1 and 2:1 cartridges

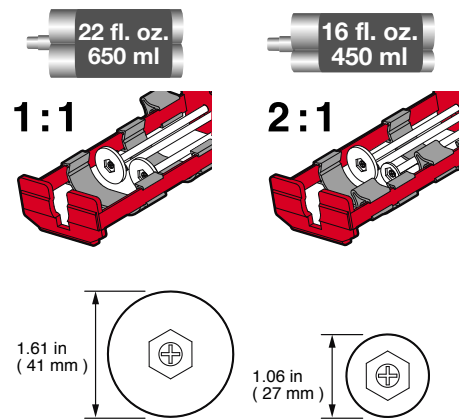

STROKE DISTANCE
0.2 in (4 mm)



ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-DSP26	58 oz. / 1,650 g	26 : 1	22 fl. oz. / 650 ml	16 fl. oz. / 450 ml	1	4	0-49296-26682-0

CAULK GUNS

CONVOY® SUPER SAUSAGE GUN 2WAY™

Removing the piston allows two material types (sausage or cartridge) to be used. No tools are needed for piston replacement.

Cartridge

Sausage pack

View Our Video

CONVOY® SUPER SAUSAGE GUN 2WAY™

Enhanced SST 360° RH



CNV-FSP26-600

STROKE DISTANCE

0.2 in (4 mm)

TT System 360° RH AFS System




CNV-FSP600

STROKE DISTANCE

0.3 in (7 mm)

- Compatible with sausage and cartridge refills
- Removable plunger
- Uniquely designed front cap enables every ounce of material to be released from the tube
- Anti-residue surface

QUICK PLUNGER™



Twin-Thrust System™



- Straight nozzle for 2way large 3pcs
CNV-FSNL 0-49296-26514-4
- Straight nozzle for 2way 3pcs
CNV-FSN 0-49296-26513-7
- Plunger for 2way
CNV-FSP 0-49296-26515-1
- Front cap for 2way
CNV-FFC 0-49296-26516-8



ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	SAUSAGEPACK SIZE	CASE	MASTER CARTON	UPC
CNV-FSP26-600	39 oz. / 1,100 g	26 : 1	10 fl. oz. / 300 ml	20 fl. oz. / 600 ml	4	16	0-49296-26683-7
CNV-FSP600	35 oz. / 990 g	12 : 1					0-49296-26512-0

CAULK GUNS

CONVOY® BULK SUPER 3WAY™

Enhanced SST 360° RH



- Supports three refill types : bulk, sausage pack and cartridge
- The Enhanced SST system
- Die-cast aluminum trigger & grip
- Anti-leakage rubber gasket on piston
- Anti-residue surface

Enhanced SST™



One-touch exchangeable pistons



Plunger depressor lock



View Our Video



Sausage pack piston
CNVBP-SP
0-49296-26021-7

Straight nozzle
CNVBP-SN
0-49296-26024-8

Bent nozzle
CNVBP-BN
0-49296-26025-5

Lubricant oil



STROKE DISTANCE
0.3 in (8.5 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	SAUSAGEPACK SIZE	BULK LOAD CAPACITY	CASE	MASTER CARTON	UPC
CNVBSP3W550	42 oz. / 1,200 g	10 : 1	10 fl. oz. / 300 ml	13 fl. oz. / 400 ml	Up to 18 fl. oz. / 550 ml max	1	4	0-49296-26019-4

CONVOY® RS™

DP Enhanced SST 360° RH



CNV-100RS

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- Dual Power, 360 Rotating Handles with contoured grips
- Extra-long seal puncture pin
- Ideal for dispensing thick, viscous materials

Dual Power™



Seal Puncture Pin



Enhanced SST™



View Our Video

STROKE DISTANCE
soft materials 0.2 in (6 mm)
hard materials 0.5 in (12 mm)



ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100RS	26 oz. / 740 g	8 : 1 / 16 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16855-1
CNV-900RS	33 oz. / 940 g		30 fl.oz. / 900 ml	4	16	0-49296-26517-5

CAULK GUNS

CONVOY® SUPER™ 26

Enhanced
SST 360°
RH




CNV-100SP26

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- 360 Rotating Handles with elastomer non-slip grips
- Extra-long seal puncture pin
- Ideal for dispensing extra-thick, viscous materials

Enhanced SST™



Seal Puncture Pin



View Our Video

STROKE DISTANCE

0.2 in (4 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP26	25 oz. / 710 g	26 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16561-1
CNV-900SP26	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-16563-5



CONVOY® SUPER™ 18

Enhanced
SST 360°
RH




CNV-100SP18

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- 360 Rotating Handles with contoured grips
- Extra-long seal puncture pin
- Ideal for dispensing thick, viscous materials

Enhanced SST™



Seal Puncture Pin



STROKE DISTANCE

0.2 in (6 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP18	25 oz. / 710 g	18 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16560-4
CNV-900SP18	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-16562-8



CAULK GUNS

CONVOY® SUPER™



- Extra-long barrel caulk guns engineered for maximum performance
- Increased thrust force with the powerful Twin-Thrust System
- 360 Rotating Handles for function and convenience
- Conveniently located seal puncture pin



CNV-100SP

Twin-Thrust System™



Seal Puncture Pin



STROKE DISTANCE

0.5 in (12 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP	25 oz. / 710 g	12 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06720-5
CNV-J900SP	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-06751-9

CONVOY® PLUS II™



- Extra-long barrel caulk guns
- Increased thrust force with the powerful Twin-Thrust System
- Automatic Flow-Stop system
- 360 Rotating Handles
- Conveniently located seal puncture pin



CNV-100PL2

Twin-Thrust System™



Seal Puncture Pin



STROKE DISTANCE

0.5 in (12 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100PL2	21 oz. / 605 g	7 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06696-3
CNV-J900PL2	32 oz. / 900 g		30 fl. oz. / 900 ml	4	16	0-49296-06705-2

CAULK GUNS

CONVOY® LITE™



- Ultra-lightweight caulk guns help alleviate fatigue from extended use
- Unique twist-lock barrel removal system allows for fast and easy tube changes
- Increased thrust force with the powerful twin-thrust dispensing system
- Automatic flow-stop mechanism



Twist-Lock Barrel Removal System



Twin-Thrust System™



STROKE DISTANCE

0.4 in (10 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100LT	17 oz. / 480 g	7 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06628-4





















MEASURING TAPES

MEASURING TAPES

PRODUCT SPECIFICATION TABLE

MEASURING TAPES CATEGORY	HOOK		
	STEEL HOOK	TEMPERED STEEL HOOK	STRONG HOOK
 <p>SIGMA STOP™</p> <p>0.6 in × 10 ft 1.0 in × 16 ft 1.0 in × 25 ft</p> <p>Pg. 31</p>	<ul style="list-style-type: none"> • SS-10BW 	<ul style="list-style-type: none"> • SS-16BW • SS-16/5MBW • SS-25BW • SS-25/7.5MBW • SSSF-16BW • SSSF-16/5MBW • SSSF-25BW • SSSF-25/7.5MBW 	
 <p>GS-LOCK™</p> <p>1.0 in × 16 ft 1.1 in × 25 ft</p> <p>Pg. 32 · 33 · 34</p>			<ul style="list-style-type: none"> • GS-16BW • GS-16/5MBW • GS-25BW • GS-25/7.5MBW • GSSF-16BW • GSSF-16/5MBW • GSSF-25BW • GSSF-25/7.5MBW • GS-C16BW • GS-C16/5MBW 
 <p>G-PLUS™</p> <p>1.0 in × 16 ft 1.0 in × 25 ft 1.0 in × 30 ft</p> <p>Pg. 37</p>		<ul style="list-style-type: none"> • GP-16BW • GP-25BW • GP-30BW 	
 <p>G-SERIES™</p> <p>0.5 in × 6 ft 1.0 in × 16 ft 1.0 in × 25 ft 1.0 in × 30 ft</p> <p>Pg. 37</p>	<ul style="list-style-type: none"> • G-6BW • G-16BW • G-25BW • G-30BW • G-5.5MBW • G-7.5MBW • G-16/5MBW • G-25/7.5MBW • G-33/10MBW 		
 <p>HI-LOCK™</p> <p>1.0 in × 16 ft 1.0 in × 25 ft 1.0 in × 30 ft</p> <p>Pg. 38</p>	<ul style="list-style-type: none"> • HL-16BW • HL-25BW • HL-30BW • HL-16/5MBW • HL-25/7.5MBW 		

MEASURING TAPES

HOOK	TAPE		CLIP		
<p>HORNED MAGNETIC HOOK</p> 	<p>STANDARD TAPE</p> 	<p>STRONG TAPE DUAL SIDED BLADE</p>  <p>Scale on both sides of blade allows you to read measurements on back</p>	<p>BELT CLIP</p> 	<p>COMPATIBLE CLIP*</p>  <p>*TAJIMA Belt Holder is sold separately.</p>	<p>SAFETY CLIP</p> 
		<p>All SIGMA STOP Series</p>	<ul style="list-style-type: none"> • SS-10BW • SS-16BW • SS-16/5MBW • SS-25BW • SS-25/7.5MBW 		<ul style="list-style-type: none"> • SSSF-16BW • SSSF-16/5MBW • SSSF-25BW • SSSF-25/7.5MBW 
<ul style="list-style-type: none"> • GS-MC16BW • GS-MC16/5MBW • GS-SC16BW • GS-SC16/5MBW 		<p>All GS-LOCK Series</p>	<ul style="list-style-type: none"> • GS-16BW • GS-16/5MBW • GS-25BW • GS-25/7.5MBW 	<ul style="list-style-type: none"> • GS-C16BW • GS-C16/5MBW • GS-MC16BW • GS-MC16/5MBW • GS-SC16BW • GS-SC16/5MBW 	<ul style="list-style-type: none"> • GSSF-16BW • GSSF-16/5MBW • GSSF-25BW • GSSF-25/7.5MBW 
	<ul style="list-style-type: none"> • GP-16BW • GP-25BW • GP-30BW 		<ul style="list-style-type: none"> • GP-16BW • GP-25BW • GP-30BW 		
	<ul style="list-style-type: none"> • G-6BW • G-25BW • G-5.5MBW • G-7.5MBW • G-16/5MBW • G-25/7.5MBW • G-33/10MBW <ul style="list-style-type: none"> • G-16BW • G-30BW 		<ul style="list-style-type: none"> • G-6BW • G-25BW • G-5.5MBW • G-7.5MBW • G-16/5MBW • G-25/7.5MBW • G-33/10MBW <ul style="list-style-type: none"> • G-16BW • G-30BW 		
	<ul style="list-style-type: none"> • HL-16BW • HL-25BW • HL-30BW • HL-16/5MBW • HL-25/7.5MBW 		<ul style="list-style-type: none"> • HL-16BW • HL-25BW • HL-30BW • HL-16/5MBW • HL-25/7.5MBW 		

MEASURING TAPES

SIGMA
Σ STOP™
 Auto Lock & Strong Lock
DUAL LOCK MECHANISM



Retract™


- Retracts by a push of a button
- Stops tape when needed

Strong Lock™

- Locks tape stronger by press a button
- Prevents tape from sliding out

Auto Lock™

- Stops tape where pulled out
- Retracts tape by a push Retract™ button




Strong Tape™
 Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures



Strong Hook™
 Thickness 1.5 mm
 Strength 4.7 times
 (In comparison testing with standard Tajima hooks) *Except SS-10BW hook



Dual Sided Blade™
 Scale on both sides of blade allows you to read measurements on back



Metric and Imperial Scale
 SS-16/5MBW, SS-25/7.5MBW
 SSSF-16/5MBW, SSSF-25/7.5MBW

MEASURING TAPES

SIGMA STOP™

10 ft 16 ft 25 ft

- Dual Lock Mechanism™
- Strong Tape™ & Strong Hook™
- Dual Sided Blade™



SS-16BW



Belt clip



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
SS-10BW	0.6 in (16 mm)	10 ft	5.3 ft / 1.6 m	6	30	0-49296-12219-5
SS-16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m			0-49296-12220-1
SS-16/5MBW		16 ft / 5 m				0-49296-12226-3
SS-25BW		25 ft				0-49296-12228-7
SS-25/7.5MBW		25 ft / 7.5 m				0-49296-12229-4

SIGMA STOP™ WITH SAFETY BELT HOLDER™

16 ft 25 ft



SSSF-25BW



SAFETY CLIP

Belt holder

- The quick-fit belt holder allows for one-handed attachment and detachment
- Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures
- Dual Lock Mechanism™
- Strong Tape™ & Strong Hook™
- Dual Sided Blade™



WEARABLE ADJUSTABLE BELT SIZES
Up to 2.4 in (60 mm) wide
Up to 0.2 in (5.5 mm) thick

ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
SSSF-16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	24	0-49296-12227-0
SSSF-16/5MBW		16 ft / 5m				0-49296-12234-8
SSSF-25BW		25 ft				0-49296-12230-0
SSSF-25/7.5MBW		25 ft / 7.5m				0-49296-12235-5

MEASURING TAPES

GS LOCK™
series
EXTRA STIFF

Armored Case
Shock-resistant armored case protects the housing from impact during inadvertent dropping.
(GS-LOCK™, G-PLUS™, G-SERIES™)

Safety Rope Tether Mount With Ring
Prevents dropping or mislaying.
(GS-LOCK™)

Strong Tape & Hook
With a thickness of 1.6 mm, the specially designed Strong Hook has an increased strength of 4.7x more than standard Tajima hooks.
(GS-LOCK™)

End Hook Guard
Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces.
(GS-LOCK™, G-PLUS™, G-SERIES™)

GS-LOCK™

16 ft 25 ft



GS-16BW



Belt clip

• Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GS-16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	30	0-49296-12199-0
GS-16/5MBW		16 ft / 5 m				0-49296-12200-3
GS-25BW	1.1 in (27 mm)	25 ft	8.5 ft / 2.6 m			0-49296-12202-7
GS-25/7.5MBW		25 ft / 7.5 m				0-49296-12203-4

MEASURING TAPES

GS-LOCK™ WITH SAFETY BELT HOLDER™

16 ft 25 ft

CLIP-
HOLD



GSSF-16BW

WEARABLE ADJUSTABLE BELT SIZES
Up to 2.4 in (60 mm) wide
Up to 0.2 in (5.5 mm) thick



SAFETY CLIP



Belt holder



- The quick-fit belt holder allows for one-handed attachment and detachment
- Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures
- Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GSSF-16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	24	0-49296-12201-0
GSSF-16/5MBW		16 ft / 5m				0-49296-12232-4
GSSF-25BW	1.1 in (27 mm)	25 ft	8.5 ft / 2.6 m			0-49296-12204-1
GSSF-25/7.5MBW		25 ft / 7.5m				0-49296-12233-1

GS-LOCK™ COMPATIBLE CLIP

16 ft

CLIP-
HOLD



GS-C16BW



STRONG HOOK™
Thickness 1.6 mm, 4.7 times stronger than standard hooks.



Compatible clip



*TAJIMA Belt holder is sold separately.



- Compatible clip is newly designed to allow for TAJIMA Safety Holder
- Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures
- Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GS-C16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	30	0-49296-12264-5
GS-C16/5MBW		16 ft / 5 m				0-49296-12265-2

MEASURING TAPES

GS-LOCK™ HORNERD MAGNETIC HOOK COMPATIBLE CLIP

16 ft



GS-MC16BW



HORNERD MAGNETIC HOOK™

Neodymium magnet (260 mT)
enables hook to attach to the place
where it's hard to hang



Compatible clip



*TAJIMA Belt holder is sold separately.



- Compatible clip is newly designed to allow for TAJIMA Safety Holder
- Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures
- Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GS-MC16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	30	0-49296-12266-9
GS-MC16/5MBW		16 ft / 5 m				0-49296-12267-6

GS-LOCK™ MAGNETIC POWER x 2 COMPATIBLE CLIP

16 ft



GS-SC16BW

STRONG MAGNETIC MOUNT



Neodymium magnet (340 mT)
specially built-in the body.
Attaches firmly to single pipe and LGS.



HORNERD MAGNETIC HOOK™



Compatible clip



*TAJIMA Belt holder is sold separately.



- Compatible clip is newly designed to allow for TAJIMA Safety Holder
- Extra-thick steel generates more stiffness than 1 in (25 mm) standard tape measures
- Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GS-SC16BW	1 in (25 mm)	16 ft	8.2 ft / 2.5 m	6	30	0-49296-12268-3
GS-SC16/5MBW		16 ft / 5 m				0-49296-12269-0

MEASURING TAPES

CLIP-n-HOLD™ SAFETY BELT HOLDER™




SF-BHLD



SF-BHLD-BK

- Allows one-handed hooking/unhooking
- Prevents from dropping or mislaying



① Press & Hold Button ② Lift up

ITEM CODE	CASE	MASTER CARTON	UPC
SF-BHLD	6	12	0-49296-02995-1
SF-BHLD-BK			0-49296-12253-9



WEARABLE ADJUSTABLE BELT SIZES
Up to 2.4 in (60 mm) wide
Up to 0.2 in (5.5 mm) thick

CLIP-n-HOLD™ BELT CLAMPING SYSTEM



- For waist belts Slide Stopper included
- Prevents from dropping or mislaying



ITEM CODE	CASE	MASTER CARTON	UPC
SF-CHLD	6	12	0-49296-16913-8



WEARABLE ADJUSTABLE BELT SIZES
Up to 2.0 in (53 mm) wide
Up to 0.1 in (3 mm) thick

CLIP-n-HOLD™ BELT CLAMPING SYSTEM FOR VERTICAL HARNESS



- For vertical harness belts
- Prevents from dropping or mislaying



ITEM CODE	CASE	MASTER CARTON	UPC
SF-THLD	6	12	0-49296-16915-2



WEARABLE ADJUSTABLE BELT SIZES
Up to 1.8 in (48 mm) wide
Up to 0.1 in (3 mm) thick

MEASURING TAPES

CLIP-n-HOLD™ METAL BODIED



- For waist belts
- Rugged metal construction



ITEM CODE	CASE	MASTER CARTON	UPC
SF-MHLD	6	12	0-49296-16914-5

WEARABLE ADJUSTABLE BELT SIZES
Up to 2.4 in (60 mm) wide
Up to 0.1 in (3 mm) thick

CLIP-n-HOLD™ METAL BODIED FOR VERTICAL HARNESS



- For vertical harness belts
- Rugged metal construction



ITEM CODE	CASE	MASTER CARTON	UPC
SF-MTHLD	6	12	0-49296-26295-2

WEARABLE ADJUSTABLE BELT SIZES
Up to 1.8 in (48 mm) wide
Up to 0.1 in (3 mm) thick

LOOP for CLIP-n-HOLD™



WEARABLE ADJUSTABLE BELT SIZES
Up to 2.9 in (75 mm) wide
Up to 0.3 in (8 mm) thick

ITEM CODE	CASE	MASTER CARTON	UPC
SF-LOOP	1	100	0-49296-12272-0

SAFETY ROPE™

- For Attached Tool Weights: up to 20 oz (567 g)
 - Standard Overall Length: 16.5 in (420 mm) (max, including halter snap)
 - Extended Length: 59.1 in (1,500 mm) (including halter snap)
 - Rope Tether Diameter: 0.1 in (3.2 mm) (polyurethane resin)
 - Core Diameter: 0.03 in (0.8 mm) (Vectran*)
- *Vectran is a registered trademark of Kuraray Co. Ltd.



Safety Belt Holder



ITEM CODE	CASE	MASTER CARTON	UPC
AZS-ROP	6	12	0-49296-02993-7

MEASURING TAPES

G-PLUS™



GP-25BW

- The Hyper-Acry-Coat protective blade coating is non-reflective and provides superior scale readability
- Tempered steel Ultra-Hard End Hooks with 4-rivet attachment ensures consistently accurate inside and outside measurements
- Thick elastomer case armor extends around the body of the tape measure to protect end hooks and work surfaces



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
GP-16BW	1 in (25 mm)	16 ft	7.87 ft / 2.4 m	4	40	0-49296-02858-9
GP-25BW		25 ft				0-49296-02859-6
GP-30BW		30 ft				0-49296-02860-2

G-SERIES™



G-25BW

- Metric measurement only (G-5.5MBW, G-7.5MBW)
- Shock-resistant, armored case
- The Hyper-Acry-Coat protective blade coating is non-reflective and provides superior scale readability
- Triple-riveted end hooks
- Cushioned end hook returns



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
G-6BW	1 in (25 mm)	0.5 in (13 mm)	6 ft	6	30	0-49296-02681-3
G-16BW		16 ft	7.87 ft / 2.4 m			0-49296-02481-9
G-25BW		25 ft				0-49296-02459-8
G-30BW		30 ft				0-49296-02527-4
G-5.5MBW		5.5 m				0-49296-02985-2
G-7.5MBW		7.5 m				0-49296-02986-9
G-16/5MBW		16 ft / 5 m				0-49296-02918-0
G-25/7.5MBW		25 ft / 7.5 m				0-49296-02460-4
G-33/10MBW		33 ft / 10 m				0-49296-02919-7

MEASURING TAPES

HI-LOCK™

- The Hyper-Acry-Coat protective blade coating is non-reflective and provides superior scale readability
- Compact, ergonomic ABS case



HL-25BW



ITEM CODE	TAPE SIZE		STAND OUT	CASE	MASTER CARTON	UPC
HL-16BW	1 in (25 mm)	16 ft	7.87 ft / 2.4 m	6	60	0-49296-02414-7
HL-25BW		25 ft		12	48	0-49296-02412-3
HL-30BW		30 ft		4	20	0-49296-02458-1
HL-16/5MBW		16 ft / 5 m		6	60	0-49296-02415-4
HL-25/7.5MBW		25 ft / 7.5 m				0-49296-02413-0

LED LIGHTS



LED LIGHTS


Pick the LED LIGHT that best fits your needs

BEAM TYPE

Great for detailed work FLOOD BEAM™



Lights up work clearly with an even luminosity. Fine wiring and surface of materials are visible closely, which is ideal for detailed work. This uniform light is easy on the eyes and less fatigue with low reflection.

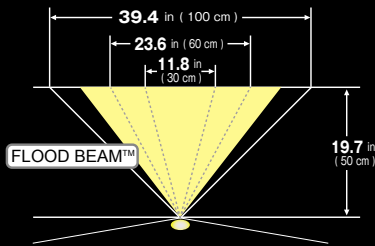


FLOOD BEAM™ Represents the angle at which the brightness of the light with an even luminosity from main body drops to 0%.

Light up a large area WIDE-ANGLE BEAM



The center beam emits the subject crisply and brightly, while the ambient beam shines on a wide area clearly from top to bottom. The spread light is ideal for work site or outdoor work with low-light condition to work safely.



Center Beam Represents the irradiation angle until the brightness of the optical axis drops to 20%.

Ambient Beam Represents the angle at which the brightness of the light emitted outside the center beam drops to 0%.

LED LIGHTS SERIES								
	LE-CL501D-SP Pg. 41	LE-E502D-SP Pg. 42	LE-F502D Pg. 42	LE-SF501D-SP Pg. 44	LE-SF352D Pg. 45	LE-F501D Pg. 43	LE-M501D Pg. 43	LE-SF351D Pg. 45
BATTERY								
	 LE-ZP3730 or AA 1.5V x 4	 LE-ZP3730 or AA 1.5V x 4	AA 1.5V x 3	 LE-ZP3730 or AA 1.5V x 4	AA 1.5V x 3	AA 1.5V x 3	AAA 1.5V x 3	AA 1.5V x 3

LED LIGHTS

CONSTANT LUMINANCE™

HYBRID
3000mAh

Maintains brightness for
At 500 lx (180 lm)
6h

FLOOD BEAM™

FLOOD BEAM™ is designed to produce bright light and makes it easy to see wiring and surface material

Keeps the same brightness until the battery runs out



Constant current circuit can maintain the brightness to be continuous without dimming in the selected light mode until the battery runs out.


Powered by high-intensity boost light



When you press the boost light button, it lights up for 10 seconds with a maximum output of 500 lm, which is convenient for checking and inspecting work and looking over a slightly wider area.

GRATI-LITE™ LE-CL501D-SP

180 lm With boost **500 lm**



- FLOOD BEAM™ is ideal for work at hand with an even luminosity
- Hybrid power source takes dedicated rechargeable battery (included) or AA batteries
- The external battery compartment can be easily opened or closed with gloves on
- 500 lm boost light for 10 seconds
- With overheat protection for continual use of boost light
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work
- Flicker-Free light



FLOOD BEAM™



Equipped with padded front bracket



The wider silicon headband provides greater comfort and less slippage



Helmet clips

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-CL501D-SP
	180 LUMENS	100 LUMENS	50 LUMENS		2m
	6h	10h	20h		76°
	42m				

ITEM CODE	CASE	MASTER CARTON	UPC
LE-CL501D-SP	6	24	0-49296-26796-4


LED LIGHTS

GRATI-LITE™ LE-E502D-SP

500lm



LE-ZP3730



- FLOOD BEAM™ is ideal for work at hand with an even luminosity
- Hybrid power source takes dedicated rechargeable battery (included) or AA batteries
- The external battery compartment can be easily opened or closed with gloves on
- 3 modes of brightness: 50 lm → 250 lm → 500 lm
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work
- Flicker-Free light



FLOOD BEAM™



Works with Li-ion rechargeable battery or AA batteries



Press the button to switch the lighting modes



Helmet clips

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-E502D-SP
	500 LUMENS	250 LUMENS	50 LUMENS		307 cd
	8h	12h	21h		2m
	35m				FLOOD BEAM
					83°

ITEM CODE	CASE	MASTER CARTON	UPC
LE-E502D-SP	6	24	0-49296-26710-0

GRATI-LITE™ LE-F502D

500lm



- FLOOD BEAM™ is ideal for work at hand with an even luminosity
- The external battery compartment can be easily opened or closed with gloves on
- 3 modes of brightness: 50 lm → 250 lm → 500 lm
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work
- Flicker-Free light



FLOOD BEAM™



Works with AA batteries



Press the button to switch the lighting modes



Helmet clips

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-F502D
	500 LUMENS	250 LUMENS	50 LUMENS		307 cd
	6h	10h	25h		2m
	35m				FLOOD BEAM
					83°

ITEM CODE	CASE	MASTER CARTON	UPC
LE-F502D	6	24	0-49296-26709-4

LED LIGHTS

GRATI-LITE™ LE-F501D

500_m



View Our Video

AA 1.5V x3

IPX4 2m



- Illuminated surface diameter is approximately 39.3 in (100 cm) when emitted at 19.6 in (50 cm) away from the subject
- The external battery compartment can be easily opened or closed with gloves on



WIDE-ANGLE BEAM



Works with AA batteries



The external battery compartment

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-F501D
	500 LUMENS	250 LUMENS	50 LUMENS	2m 3480cd	
	6h	10h	25h	LIGHT DISTRIBUTION	
	118m			Center Light Beam 26°	Ambient Light Beam 165°

ITEM CODE	CASE	MASTER CARTON	UPC
LE-F501D	6	24	0-49296-26679-0

GRATI-LITE™ LE-M501D

500_m



View Our Video

AAA 1.5V x3

IPX4 2m



- Illuminated surface diameter is approximately 36.6 in (93 cm) when emitted at 19.6 in (50 cm) away from the subject
- Strong Neodymium magnet on the back
- Detachable, rotate and slide mechanism
- Shut-off mode prevents accidental activation and battery depletion



WIDE-ANGLE BEAM



Works with AAA batteries



Magnet on the back



Shut-off Dial

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-M501D
	500 LUMENS	250 LUMENS	50 LUMENS	2m 2500cd	
	4h	6h	15h	LIGHT DISTRIBUTION	
	100m			Center Light Beam 32°	Ambient Light Beam 86°

ITEM CODE	CASE	MASTER CARTON	UPC
LE-M501D	6	24	0-49296-26680-6

LED LIGHTS

HYBRID

500 Im

GRATI-LITE™

LE-SF501D-SP

FLOOD BEAM™

FLOOD BEAM™ is designed to produce bright light and makes it easy to see wiring and surface material



View Our Video

LED Detachable Work Light with belt clamping system



Common features to "SF" series



Use as a hand-held flashlight or as a work light



Swivel head to aim the light

GRATI-LITE™ LE-SF501D-SP




- FLOOD BEAM™ is ideal for work at hand with an even luminosity
- Hybrid power source takes dedicated rechargeable battery (included) or AA batteries
- Safety Holder that can be attached to the vertical harness belt
- 3 modes of brightness: 50 lm → 250 lm → 500 lm
- Flicker-Free light
- A molded hole for lanyard attachments to prevent dropping



- FLOOD BEAM™
- Hybrid power source takes dedicated rechargeable battery (included) or AA batteries
- Neodymium magnet can be attached to any ferromagnetic metal surface like steel
- Can be attached facing up or down

Specifications

FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-SF501D-SP
	500 LUMENS	250 LUMENS	50 LUMENS		2m 307cd
	8h	12h	21h		LIGHT DISTRIBUTION FLOOD BEAM
	35m				83°



ITEM CODE	CASE	MASTER CARTON	UPC
LE-SF501D-SP	6	24	0-49296-26716-2

LED LIGHTS

GRATI-LITE™ LE-SF352D

350_{lm}

CLIP-n-HOLD™



AA 1.5V × 3
IPX4 2m

- FLOOD BEAM™ is ideal for work at hand with an even luminosity
- Safety Holder that can be attached to the vertical harness belt
- 3 modes of brightness: 15 lm → 150 lm → 350 lm
- Strong Neodymium magnet on the back
- Flicker-Free light
- A molded hole for lanyard attachments to prevent dropping



FLOOD BEAM™



Works with AA batteries



Neodymium magnet attach the light to pipes, steels, etc



Can be attached facing up or down

Specifications

FL 1 STANDARD	MODE 3	MODE 2	MODE 1	FL 1 STANDARD	LE-SF352D
	350 LUMENS	150 LUMENS	15 LUMENS		225cd
	8h	20h	65h		83°
	30 m	LIGHT DISTRIBUTION FLOOD BEAM			



ITEM CODE	CASE	MASTER CARTON	UPC
LE-SF352D	6	24	0-49296-26717-9

GRATI-LITE™ LE-SF351D


350_{lm}

CLIP-n-HOLD™



AA 1.5V × 3
IPX4 2m


- Safety Holder that can be attached to the vertical harness belt
- 3 modes of brightness: 15 lm → 150 lm → 350 lm
- Can be used as a work light
- Flicker-Free light
- A molded hole for lanyard attachments to prevent dropping
- Strong Neodymium magnet on the back



WIDE-ANGLE BEAM



Works with AA batteries



Powerful Neodymium Magnet



Ideal for recreational use on your backpack

Specifications

FL 1 STANDARD	MODE 3	MODE 2	MODE 1	FL 1 STANDARD	LE-SF351D
	350 LUMENS	150 LUMENS	15 LUMENS		2940cd
	8h	20h	65h		24°
	108m	LIGHT DISTRIBUTION Center Light Beam Ambient Light Beam			



ITEM CODE	CASE	MASTER CARTON	UPC
LE-SF351D	6	24	0-49296-26681-3

LITHIUM-ION BATTERY ZP3730

3.7V



- High-capacity, long-lasting battery
- Voltage: 3.7V; Capacity: 3000mAh

ITEM CODE	CASE	MASTER CARTON	UPC
LE-ZP3730	6	96	0-49296-16558-1

DRYWALL TOOLS



DRYWALL TOOLS

DRYWALL CHAMFER™

- Smooth work with durable aluminum die-cast and FLUORO COAT™



Adjustment Plate



View Our Video


DRYWALL CHAMFER™



- Adjustment plate for 4 settings of chamfer width
TBK180-H45 : 0.04 in (1 mm), 0.06 in (1.5 mm),
0.08 in (2 mm), 0.12 in (3 mm)


Ideal for

Plasterboards, Calcium silicate boards



- Ⓐ 2.25 in (57 mm)
- Ⓑ 0.59 in (15 mm)
- Ⓒ 0.63 in (16 mm)
- Ⓓ 1.18 in (30 mm)

Dual-purpose



ITEM CODE	CASE	MASTER CARTON	UPC
TBK180-H45	6	36	0-49296-05631-5


DRYWALL CHAMFER™ PLANE30°




- Adjustment plate for 4 settings of chamfer width
TBK180-V30 : 0.04 in (1 mm), 0.08 in (2 mm),
0.12 in (3 mm), 0.16 in (4 mm)

Ideal for

Plasterboards, Calcium silicate boards



- Ⓐ 2.25 in (57 mm)
- Ⓑ 1.46 in (37 mm)
- Ⓒ 0.63 in (16 mm)
- Ⓓ 1.18 in (30 mm)



ITEM CODE	CASE	MASTER CARTON	UPC
TBK180-V30	6	36	0-49296-05630-8

DRYWALL TOOLS



DRYWALL CHAMFER™

- Rust free, durable, Ceramic Blades (16 times more durable, compared to Tajima's steel blades)
- Adjustable chamfer widths



DRYWALL CHAMFER™ PLANE45° "SUPER HARD™"

- Reinforced blade locking mechanism to minimize blade chatter
- Durable die-cast aluminum and stainless steel coated base
- 3 spare blades can be stored inside
- Compatible with 0.7 in (18 mm) or 0.9 in (22 mm) wide blades



Ideal for

Melamine non-combustible decorative panels, Plywoods, Calcium silicate boards, Plasterboards



ITEM CODE	CASE	MASTER CARTON	UPC
TMK-KV45	6	36	0-49296-05827-2

CERAMIC BLADE™

for Drywall Chamfer "SUPER HARD™"



ITEM CODE	CASE	MASTER CARTON	UPC
TMKB-C50	10	30	0-49296-05829-6

DRYWALL TOOLS

DRYWALL RASP™ 5

Fine / Medium

- Angled rasping for any corners
- Specifically for detailed work



View Our Video



Drywall Rasp™ 5 **Fine / Medium**

- Detailed rasp work on plasterboard
- New tetra teeth resists clogging and sharpens in both directions
- Rasp in any directions, ideal for detailed work in inner corners
- Stainless steel fin, convenient for holding down paper on boards and tightening screws
- Fits in tool pouch, compact size
- Lightweight


Ideal for
Plasterboards



TBY-S130S



TBY-S130C



A close up of rasp (Fine)



(Medium)



Stainless steel fin

ITEM CODE	CASE	MASTER CARTON	UPC
TBY-S130S	6	60	0-49296-05663-6
TBY-S130C			0-49296-05662-9

DRYWALL TOOLS



COMBINATION DRYWALL RASP™ 7

- Unique drywall rasp with three distinct grinding sections
- Efficiently grinds in both directions



Drywall Rasp™ 7

- New tetra teeth resists clogging and sharpens in both directions
- Siderail teeth are great for notching and spot grinding
- Lightweight

Ideal for
Plasterboards, Calcium silicate boards



Work horizontally to collect dust





In-handle dust collection



Hold upright to empty dust

Tetra-Teeth™



- ① Coarse teeth for fast grinding, up to 1 in (25.4 mm) thick
- ② Fine teeth for finishing
- ③ Siderail teeth for corners

ITEM CODE	CASE	MASTER CARTON	UPC
TBYD-180	6	36	0-49296-05666-7

DRYWALL TOOLS




Double-sided drywall rasp

DRYWALL RASP™ 7

- Rust free, durable, Ceramic rasp teeth (10 times more durable than metal teeth, compared to Tajima's metal rasp teeth)
- Ideal for super hard gypsum boards
- Angled rasping for any corners

Drywall Rasp™ 7 “SUPER HARD™”

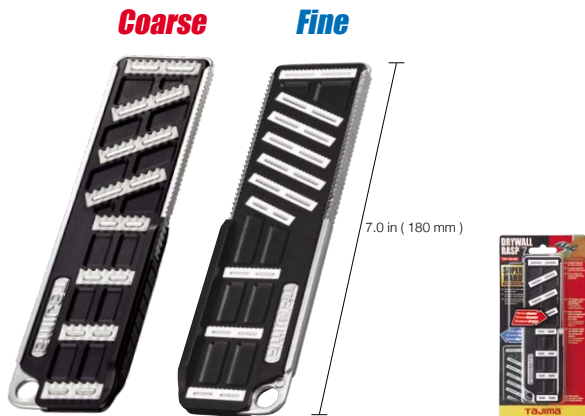

- Double-sided drywall rasp
- The tetra teeth grabs the material and cuts 20% more than a fixed blade
- Non-slip elastomer grip for a secure hold
- Lightweight

10 times more durable than standard rasp

Amazing endurance - SUPER HARD™ with fine ceramic blade is longer lasting. They are made to withhold wear.

Ideal for

Plasterboards, Calcium silicate boards
Super hard gypsum boards

Endurance test: **SUPER HARD™** vs. Standard metal rasp
(comparison of wear after same usage)



SUPER HARD™
Ceramic rasp teeth



Standard rasp teeth



Coarse

Coarse is used to shave material quickly and harshly with the rough rasp teeth.



Fine

Fine is used to finish work smoothly with a small amount of shaving.

ITEM CODE	CASE	MASTER CARTON	UPC
TBY-SH180	6	30	0-49296-05710-7

DRYWALL TOOLS

Efficient Drywall Tools

GT JAB-SAW™

- Cuts through any drywalls




GT JAB-SAW™



- Steel-reinforced jab saw with ergonomic elastomer handle
- Replaceable heavy-duty 0.05 in (1.2 mm) thick blade with twin-rows of razor-sharp cutting teeth

Ideal for
Plasterboards, Plywoods

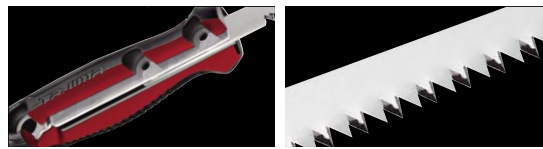

The blade is sandwiched in the handle by two steel reinforcement plates and secured by two Allen screws.

BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS
6.5 in (165 mm)	0.14 in (3.75 mm)	7 TPI	0.05 in (1.2 mm)



JAPANESE TEMPERED
Unique steel hardening process that results in blades with exceptional durability and cutting performance.



IMPULSE HARDENED
Spot hardening of blade teeth to further enhance the cutting performance while not reducing blade flexibility.

ITEM CODE	CASE	MASTER CARTON	UPC
GT165JS	12	72	0-49296-11163-2

GT JAB-SAW™

Replacement Blades



ITEM CODE	CASE	MASTER CARTON	UPC
GTB165JS	3	24	0-49296-11164-9

**UTILITY KNIVES &
BLADES**







































UTILITY KNIVES & BLADES

VR-SERIES UTILITY KNIVES



Rugged one-piece fixed-blade utility knife opens easily with a large thumb-screw featuring a magnetic blade retainer and spare blades clip.




BLADE TYPE	ITEM CODE	INCLUDES BLADES	CASE	MASTER CARTON	UPC	MATERIAL SUITABILITY INDEX	CORRESPONDING KNIVES
<h3>V-REX™ II</h3> <p>Premium tempered steel blades with razor-sharp cutting edges, optimized for drywall and other heavy-duty cutting and scoring tasks.</p>   	VRB2-5B 	5	 	 	0-49296-11160-1	BUILDING MATERIAL  ★★ ★★ ★★	 VR-101R  VR-102B  VR-103
	VRB2-50B 	50	 	 	0-49296-11161-8	PAPER  ★★ ★★	
	VRB2-100B 	100	 	 	0-49296-11162-5	WOOD  ★★ ★★	
<h3>DEEP HOOK™</h3> <p>Premium-grade deep hook blades designed to prevent slip off when cutting rigid roofing or flooring material.</p> 	HKB-5B 	5	 	 	0-49296-01956-3	BUILDING MATERIAL  ★★ ★★	
	HKB-50B 	50	 	 	0-49296-01956-6		

★★★ best ★★ better

UTILITY KNIVES & BLADES

VR SERIES - FIXED BLADE


- Rugged one-piece fixed blade utility knife
- Open easily with a large thumb-screw



ITEM CODE	INCLUDES BLADES	BLADE	CASE	MASTER CARTON	UPC
VR-101R	3	FIXED BLADE	12	48	0-49296-01966-2

VR SERIES - RETRACTABLE BLADE


- Rugged one-piece retractable utility knife
- Open easily with a large thumb-screw



ITEM CODE	INCLUDES BLADES	BLADE	CASE	MASTER CARTON	UPC
VR-102B	3	RETRACTABLE BLADE	12	48	0-49296-01967-9

VR SERIES - SAFETY KNIFE

- Self-retracting utility knife
- Conveniently located slide lock mechanism





























































ITEM CODE	INCLUDES BLADES	BLADE	CASE	MASTER CARTON	UPC
VR-103	3	SELF-RETRACTABLE BLADE	12	48	0-49296-11024-6

UTILITY KNIVES & BLADES

THE TAJIMA DIFFERENCE

Strategically-designed blades that combine the best in material, tempering, and sharpening.



BLADE WIDTH	BLADE	ITEM CODE	INCLUDES BLADES	CASE	MASTER CARTON	UPC	CORRESPONDING KNIVES
1 in 25 mm	Rock Hard Blade™ SK120 16 g 	 LCB-65 	10	 6  60	 60  600	0-49296-02088-0	 DC660N  DC661N
		 LCB-65-20 	20	 6  120	 60  1,200	0-49296-01815-3	 ACM-700C  ACM-700SC
		 CB65C 	10	 10  100	 60  600	0-49296-11197-7	 AC-700S  AC-701S
	SOLID Rock Hard Blade™ SK120 16 g 	 LCB-65S 	10	 10  100	 50  500	0-49296-01995-2	 LC-660  LC-661
		 LCB-65RB 	10	 6  60	 60  600	0-49296-11153-3	 DFC670N-R1  DFC671N-R1
			 CB65RBC 	10	 10  100	 60  600	0-49296-11198-4
0.9 in 22 mm	Endura-Blade™ SK120 10 g 	 LCB-62 	10	 6  60	 60  600	0-49296-02155-9	 DC-690  LC-620  SCR-L series

UTILITY KNIVES & BLADES



**Only SK-120
Premium Grade Steel**

The purest grade of steel ensures the strongest-possible core and results in a more accurately tooled and sharpened blade.



**Precise,
Multi-Step Sharpening**

Optimized cutting edge geometry and advanced honing techniques results in consistent, superior cutting performance.



Japanese-Style Tempering


A centuries-old process of heat-treating and hardening the steel to further maximize blade strength and cutting edge life.

OPTIMIZED BLADE GEOMETRY AND CUTTING EDGE ANGLES To ensure the best cutting performance for specific types of material.




Endura-Blade™

For general purpose scoring and cutting, ideal for work with drywall, wood and other thick materials. An extremely sharp and strong blade that integrates premium steel, Japanese-style tempering and multi-step sharpening to produce a dependable, solid feel and long cutting performance.



Razar Black Blade™

For precise cutting and fine material slicing, ideal for work with paper, film and other thin materials. A razor-sharp acute angle blade that integrates premium steel, Japanese-style tempering and multi-step sharpening to produce an exceptionally smooth and fine quality of cut.



BLADE WIDTH	BLADE	ITEM CODE	INCLUDES BLADES	CASE	MASTER CARTON	UPC	CORRESPONDING KNIVES		
0.7 in 18 mm	Endura-Blade™ SK120 6 g Blade Thickness: 0.02 in (0.5 mm)	LCB-50	10	10	100	120	1,200	DFC560N DFC561N	
		LCB-50-50	50	10	500	50	2,500	DC540N ACM-500C	
		CB50C	10	10	100	120	1,200	AC-500B AC-501R	
	Max Point Endura-Blade™ SK120 6 g Blade Thickness: 0.02 in (0.5 mm)	LCB-50D	10	10	100	120	1,200	AC-521R DC-560	
		SOLID Endura-Blade™ SK120 6 g Blade Thickness: 0.02 in (0.5 mm)	LCB-50S	10	10	100	120	1,200	DC-561 LC-560
			LC-561						
	Razar Black Blade™ SK120 6 g Blade Thickness: 0.02 in (0.5 mm)	LCB-50RB	10	10	100	120	1,200	LC-561 LC-520	
		LCB-50RB-50	50	10	500	50	2,500		LC-521 LC-500
		CB50RBC	10	10	100	120	1,200		LC-501 SCR-L series
	0.4 in 9 mm	Endura-Blade™ SK120 2 g Blade Thickness: 0.01 in (0.38 mm)	LCB-30	10	10	100	120	1,200	LC-360 LC-301
			LCB-30-50	50	10	500	100	5,000	
		Razar Black Blade™ SK120 2 g Blade Thickness: 0.01 in (0.38 mm)	LCB-30RB	10	10	100	120	1,200	
30° Acute Angle Blade™ SK120 2 g Blade Thickness: 0.01 in (0.38 mm)			CB39RBH	10	10	100	240	2,400	

UTILITY KNIVES & BLADES

Tajima 

Premium Quality, Recognized Globally™



Tajima's premium-class cutter knives were specifically designed to meet the needs of professionals.

- Extra-strong tempered blade sleeves provide smooth and reliable blade extension and retraction
- High-quality cutter knives deliver superior performance and longevity
- Customized handles and grips for optimal ease of use

Slick. Sharp. Smart.




View Our Video

DFC560N / 561N



- Opening cartons, scoring thick cardboard and prying open the lids



DFC560N



DFC561N



ITEM CODE	BLADE WIDTH	INCLUDES BLADE	BLADE LOCK	CASE	MASTER CARTON	UPC
DFC560N	0.7 in (18 mm)	1	AUTO BLADE LOCK	10	120	0-49296-11189-2
DFC561N			DIAL BLADE LOCK			0-49296-11190-8

UTILITY KNIVES & BLADES

DC540N L 0.7 in (18 mm)



- Extended grip ensures safe and efficient cable stripping



ITEM CODE	BLADE WIDTH	INCLUDES BLADE	BLADE LOCK	CASE	MASTER CARTON	UPC
DC540N	0.7 in (18 mm)	1	AUTO BLADE LOCK	10	60	0-49296-11191-5

DC660N / 661N H 1 in (25 mm)



DC660N



DC661N

- 1 in / 25 mm cutter knives with elastomer grip, ultra-hard tempered blade sleeves and lanyard attachment hole



ITEM CODE	BLADE WIDTH	INCLUDES BLADE	BLADE LOCK	CASE	MASTER CARTON	UPC
DC660N	1 in (25 mm)	1	AUTO BLADE LOCK	10	60	0-49296-11192-2
DC661N			DIAL BLADE LOCK			0-49296-11193-9

DC390B



- Tempered blade sleeve with a multifunction “micro-driver” tip



ITEM CODE	BLADE WIDTH	INCLUDES BLADE	BLADE LOCK	CASE	MASTER CARTON	UPC
DC390B	0.4 in (9 mm)	1	AUTO BLADE LOCK	10	120	0-49296-11188-5


UTILITY KNIVES & BLADES



These stylish and highly functional knives were designed with key features to make them ideal for every task. With the automatic blade feed systems and the removable magazine, blade trim and reload is quick and convenient. The rugged die-cast aluminum handles with embedded elastomer non-slip grips provide superior in-hand control.

ALUMINIST® MAGAZINE

- Die-cast aluminum cutter knives
- Automatic blade feed
- Removable magazine holds up to 5 blades of the 1 in (25 mm) blades or 6 of the 0.7 in (18 mm) blades



Removable magazine for fast reloads



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
ACM-700C	1 in (25 mm)	3	DIAL BLADE LOCK	4	40	0-49296-01843-6
ACM-700SC	1 in (25 mm) (non-segmented)		AUTO BLADE LOCK			0-49296-01926-6
ACM-500C	0.7 in (18 mm)		AUTO BLADE LOCK		20	0-49296-01928-0

UTILITY KNIVES & BLADES

ROCK HARD ALUMINIST®

- Die-cast aluminum 1 in (25 mm) blade cutter knives
- In-handle blade storage
- Available in Auto-Blade Lock or Dial Blade Lock mechanisms



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
AC-700B	1 in (25 mm)	3	AUTO BLADE LOCK	4	40	0-49296-01813-9
AC-700S						0-49296-01828-3
AC-701S			DIAL BLADE LOCK			0-49296-01829-0
AC-701R						0-49296-01814-6

HEAVY DUTY ALUMINIST®


- Die-cast aluminum 0.7 in (18 mm) blade cutter knives
- In-handle spare blade storage
- Available in Automatic Blade Lock or Dial Blade Lock mechanisms



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
AC-500B	0.7 in (18 mm)	3	AUTO BLADE LOCK	4	40	0-49296-01887-0
AC-501R			DIAL BLADE LOCK			0-49296-01888-7

HEAVY DUTY ALUMINIST® FIN

- Die-cast aluminum 0.7 in (18 mm) blade cutter knife with contoured handle
- Multi-function fin
- Dial Blade Lock mechanism

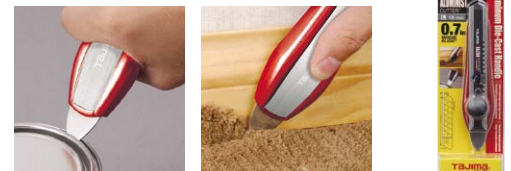

ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
AC-521R	0.7 in (18 mm)	1	DIAL BLADE LOCK	4	40	0-49296-01899-3

UTILITY KNIVES & BLADES

DRIVER CUTTER™

PREMIUM GRADE STEEL JAPANESE-STYLE TEMPERING MULTISTEP SHARPENING

Super Hard Tip™

Unique line of knives that feature ultra-hard 0.04 in (1mm) thick tempered blade sleeves with multi-function “driver” tips.

3.5 times stronger than standard models, the Driver Cutter™ blade sleeves conform to strict JIS standards for screwdriver tip hardness so they will easily drive standard head screws. Additionally, Driver Cutter knives can also handle other common tasks including lifting can lids, and opening boxes without having to extend the knife blade.



Driving standard-head screws.



Prying open the lids



Opening cartons, scoring thick cardboard



DRIVER CUTTER™

L
0.7 in (18 mm)

- 0.7 in (18 mm) cutter knives
- Super Hard Tip
- Elastomer grip and in-handle spare blade storage
- Equipped with 3 Razar Black Blade™
- Available with Automatic Blade Lock or Dial Blade Lock mechanisms



DC-560

DC-561




ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
DC-560	0.7 in (18 mm)	3	AUTO BLADE LOCK	10	120	0-49296-01992-1
DC-561			DIAL BLADE LOCK			0-49296-01993-8

UTILITY KNIVES & BLADES

Tajima Comfort-Grip Knives
GRI® SERIES

PREMIUM GRADE STEEL JAPANESE STYLE TEMPERING MULTIPURPOSE SHARPENING



Comfortable elastomer grips are ribbed for non-slip performance

Auto Blade Lock System

Strong Blade Sleeve

Dial Blade Lock System

ROCK HARD GRI®



- Extra heavy-duty 1 in (25 mm) blade cutter knives with comfort grip
- Equipped with a Rock Hard Blade™
- Available in Automatic Blade Lock or Dial Blade Lock mechanisms



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-660	1 in (25 mm)	1	AUTO BLADE LOCK	10	120	0-49296-01580-0
LC-661			DIAL BLADE LOCK			0-49296-01581-7

HEAVY DUTY GRI®



- Heavy-Duty 0.7 in (18 mm) blade cutter knives with comfort grip
- Equipped with an Endura-Blade™
- Available in Automatic Blade Lock or Dial Blade Lock mechanisms



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-560	0.7 in (18 mm)	1	AUTO BLADE LOCK	10	120	0-49296-01561-9
LC-561			DIAL BLADE LOCK			0-49296-01564-0

PRECISION CRAFT GRI®



- Precision 0.4 in (9 mm) blade cutter knife with comfort grip
- Equipped with an Endura-Blade™
- Slide Lock blade locking mechanism



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-360	0.4 in (9 mm)	1	SLIDE BLADE LOCK	10	120	0-49296-01582-4

UTILITY KNIVES & BLADES


STRONG-J GRIP™



Powerful Two-Handed Cutter
Handle ensures a straight cut, even when pressing with both hands.



The slider button is recessed below the gripping surface, minimizing the risk of auto lock release even when gripping with both hands.



0.04 in (1.0 mm) thick tempered stainless steel blade sleeve. This stainless steel sleeve supports and protects the blade point.



Blade Lock that holds 55 lbs (25 kg) of locking force for extreme cutting.



STRONG-J GRIP™



- Extra heavy-duty 0.9 in (22 mm) blade cutter knife
- Enable to use for peeling off the caulking material
- Suitable for cutting thick materials such as carpet, thermal insulation, plasterboard, and plywoods



J 10 J-Power Blades included
0.9 in (22 mm)



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
DC-690	0.9 in (22 mm)	10	AUTO BLADE LOCK	6	24	0-49296-11250-9

UTILITY KNIVES & BLADES

ROCK HARD® SERIES

PREMIUM GRADE STEEL JAPANESE STYLE TEMPERING MULTISTEP SHARPENING



View Our Video

Effective against any sheet materials, plywood and other thick materials, using a 0.03 in (0.7 mm) thick tempered blade.

Razer Black Blade™

1 in
25 mm

H
1 inch (25 mm)

SHARP




AUTO LOCK
DFC670N-R1

Grip form

The new handle is designed specifically for comfort and ease of use.

Tempered blade sleeve with fin end

At 1.0 mm thick, the hardness of this sleeve is more than double that of existing stainless steel blade sleeves. This sleeve's iconic FIN design is not only durable, it offers additional functionality in opening and prying.



A blade-sliding mechanism built for precision

Slider movements can be felt in hand when moving back and forward. Compared to existing slider feature, this tool gives more precise feeling from the grip to hand.



SUPER HARD TIP™

The extended blade sleeve holds blade sturdily, preventing blade breakage.



ROCK HARD® FIN™ **H** 1 in (25 mm)

- Tempered blade sleeve; the hardness level is 2x more than existing stainless steel sleeves
- Durable super hard tip
- Iconic FIN design provides added functionality in opening and prying



In-handle blade storage

Pre-loaded with two spare blades located in the convenient in-handle storage compartment.



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
DFC670N-R1	1 in (25 mm)	2	AUTO BLADE LOCK	6	60	0-49296-11251-6
DFC671N-R1			DIAL BLADE LOCK			0-49296-11252-3

UTILITY KNIVES & BLADES

ROCK HARD®



- Extra heavy-duty 1 in (25 mm) blade cutter knife with thick elastomer grip
- Equipped with a Rock Hard Blade™



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-650	1 in (25 mm)	1	DIAL BLADE LOCK	6	60	0-49296-02087-3

LC-620



- Extra heavy-duty 0.9 in (22 mm) blade cutter knife
- In-handle spare blade storage
- Equipped with 3 Endura-Blade™
- Auto-Lock blade locking mechanism



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-620	0.9 in (22 mm)	3	AUTO BLADE LOCK	10	120	0-49296-02154-2

LC-520 / 521



- 0.7 in (18 mm) blade cutter knives
- Ergonomic grip surrounds an extra-thick blade sleeve
- In-handle spare blade storage
- Equipped with an 3 Razar Black Blade™
- Available in Auto-Lock or Dial Lock blade locking mechanism



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-520	0.7 in (18 mm)	3	AUTO BLADE LOCK	10	120	0-49296-11093-2
LC-521			DIAL BLADE LOCK			0-49296-11094-9

UTILITY KNIVES & BLADES

LC-500 / 501 L 0.7 in (18 mm)



LC-500



LC-501

- Heavy-duty 0.7 in (18 mm) blade cutter knives
- In-handle blade storage
- Equipped with 3 Endura-Blade™
- Available in Auto Lock or Dial Lock blade locking mechanism
- 40 piece displays available in 4-color



LC501-A40



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-500	0.7 in (18 mm)	3	AUTO BLADE LOCK	10	120	0-49296-02010-1
LC500-C40				1 set (40)	3 sets (120)	0-49296-02147-4
LC-501			DIAL BLADE LOCK	10	120	0-49296-02134-4
LC501-A40				1 set (40)	3 sets (120)	0-49296-02146-7

PRECISION CRAFT STAINLESS STEEL A 0.4 in (9 mm)



LC-301



LC-302

- 0.4 in (9 mm) blade cutter knives
- Sleek and lightweight
- Equipped with 3 Endura-Blade™
- Available in Slide Lock or Dial Lock blade locking mechanism



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-301	0.4 in (9 mm)	3	SLIDE BLADE LOCK	10	120	0-49296-02004-0
LC-302			DIAL BLADE LOCK			0-49296-02006-4

PRECISION CRAFT A 0.4 in (9 mm)



LC-303

- 0.4 in (9 mm) blade cutter knife
- Slim handle with in-handle blade storage
- Equipped with 3 Endura-Blade™
- Slide Lock blade locking mechanism
- 60 piece displays available in 3-color



LC303-D60



ITEM CODE	BLADE WIDTH	INCLUDES BLADES	BLADE LOCK	CASE	MASTER CARTON	UPC
LC-303	0.4 in (9 mm)	3	SLIDE BLADE LOCK	10	120	0-49296-02007-1
LC303-D60				1 set (60)	4 sets (240)	0-49296-02152-8

SCRAPERS

SCRAPE-RITE™



Use with a hammer for chisel-like tasks



Smoothing the floor surface

Scraping off wall paper

Protective blade guard

Spring-loaded blade clamp



SCRAPE-RITE™

- Reversible blade scrapers
- Die-cast aluminum heads
- Reinforced shafts



SCR-H1200

3 blades included
LCB-65S



SCR-L600



SCR-L300



SCR-L200

3 blades included
in each item
LCB-50S

ITEM CODE	BLADE WIDTH	INCLUDES BLADES	FEATURES	CASE	MASTER CARTON	UPC	
SCR-H1200	1 in (25 mm)	3	48 in (1200 mm) handle	4	8	0-49296-01996-9	
SCR-L600	0.7 in (18 mm)		24 in (600 mm) handle		24	0-49296-01614-2	
SCR-L300			12 in (300 mm) handle		0-49296-01613-5		
SCR-L200			8 in (200 mm) handle		0-49296-01612-8		
LCB-65S	1 in (25 mm)	10	SOLID ROCK HARD BLADE™	10	50	500	0-49296-01995-2
LCB-50S	0.7 in (18 mm)		SOLID ENDURA-BLADE™				120

PULL-STROKE SAWS



PULL-STROKE SAWS

JAPAN PULL™ BLADES



Japanese tempered SK-95 premium steel blade with triple cutting edge teeth and Fluoro-Coat™ blade coating.



Japanese tempered SK-95 premium steel blade with triple cutting edge teeth.



Japanese Tempered

Unique steel hardening process that results in blades with exceptional durability and cutting performance.




Impulse Hardened

Spot hardening of blade teeth to further enhance the cutting performance while not reducing blade flexibility.



Fluoro-Coat™


Unique fluorine-based coating that reduces friction and protects against rust and corrosion.

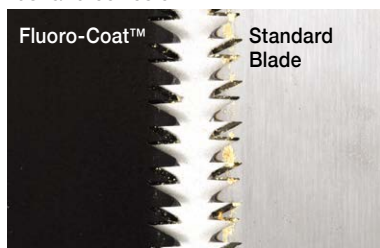


*After 100 times cutting through 1.57 in (40 mm) thick branches.



Alternating 4 tall, 4 short teeth pattern that results in cutting edge sharpness that lasts 3 times longer.

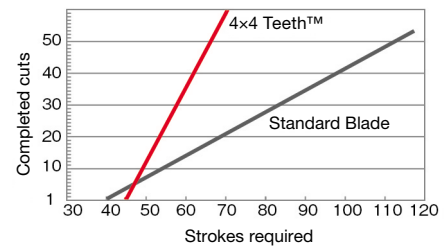


Extra rigid blade for superior tracking and cutting control.

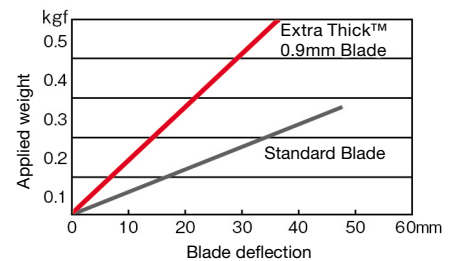

PULL-STROKE SAWS

JAPAN PULL™ R-SAW

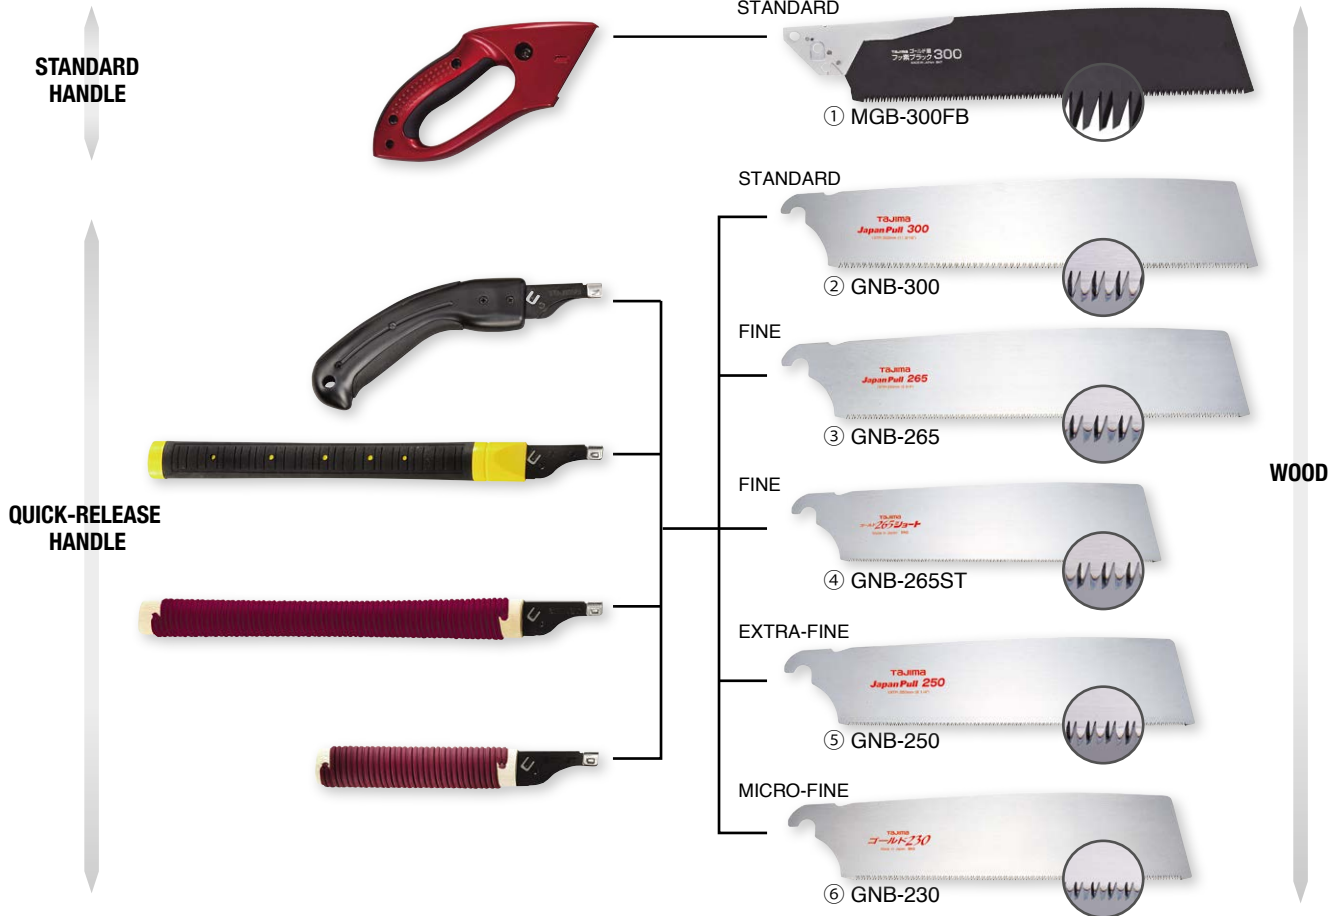

BLADE						MATERIAL SUITABILITY INDEX				
	CUT	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS					
					KERF WIDTH					
① MGB-300FB	STANDARD CUT	11.8 in (300 mm)	0.08 in (2.15 mm)	13 TPI	0.03 in. (0.7 mm)	/	★	★★	★★★	★★★
② GNB-300					0.05 in. (1.15 mm)	/	★	★★	★★★	★★★
③ GNB-265	FINE CUT	10.4 in (265 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)	/	★★	★★★	★★★	★
④ GNB-265ST		9.1 in (230 mm)			0.04 in. (0.9 mm)	/	★★	★★★	★★★	★
⑤ GNB-250	EXTRA FINE CUT	9.8 in (250 mm)	0.06 in (1.40 mm)	19 TPI	0.02 in. (0.6 mm)	/	★	★★	★	/
⑥ GNB-230	MICRO FINE CUT	9.1 in (230 mm)	0.05 in (1.20 mm)	21 TPI	0.04 in. (0.9 mm)	/	★★	★★	★	/
					0.02 in. (0.5 mm)	/	★★★	★★	★	/
					0.03 in. (0.7 mm)	/	★★★	★★	★	/

★★★ Best ★★ Better ★ Good

PULL-STROKE SAWS

MAGNUM® 300



Premium carpenter saw featuring a 13 TPI Fluoro-Coat blade. The oversized handle with an embedded elastomer grip combines style and functionality for greater ease of use. A protective blade guard which covers the entire blade is included for added safety.



MAGNUM® 300



- Premium carpenter saw featuring a 13 TPI Fluoro-Coat Blade™
- The oversized handle with an embedded elastomer grip combines style and functionality for greater ease of use
- A protective blade guard which covers the entire blade is included for added safety



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
MG-300FB	11.8 in (300 mm)	0.08 in (2.15 mm)	13 TPI	0.03 in. (0.7 mm)	4	12	0-49296-01883-2
				0.05 in. (1.15 mm)			

MAGNUM® 300 BLADE



- Premium-grade 13 TPI Fluoro-Coat Blade™
- Exclusive replacement blade for the Magnum 300 saw



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
MGB-300FB	11.8 in (300 mm)	0.08 in (2.15 mm)	13 TPI	0.03 in. (0.7 mm)	2	12	0-49296-01884-9
				0.05 in. (1.15 mm)			

PULL-STROKE SAWS

JAPAN PULL™ 265R



- Precision cut pull-stroke saw
- Quick-release blade retainer
- Traditional straight handle with elastomer grip



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
JPR-265R	10.4 in (265 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)	6	24	0-49296-01971-6
				0.04 in. (0.9 mm)			

JAPAN PULL™ 265 SHORT



- Precision cut pull-stroke saw
- Quick-release blade retainer
- Short straight handle with tubular elastomer grip
- Total length: 16 in (406 mm)



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
JPR-265ST	9.1 in (230 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)	6	24	0-49296-11102-1
				0.04 in. (0.9 mm)			

PULL-STROKE SAWS

JAPAN PULL™ 300 / 265



JPR-300



JPR-265



- Standard cut pull-stroke saw (JPR-300)
- Precision cut pull-stroke saw (JPR-265)
- Quick-release blade retainer
- Curved handle with elastomer non-slip grip

ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
JPR-300	11.8 in (300 mm)	0.08 in (2.15 mm)	13 TPI	0.03 in. (0.7 mm)	6	24	0-49296-01944-0
				0.05 in. (1.15 mm)			
JPR-265	10.4 in (265 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)		24	0-49296-01943-3
				0.04 in. (0.9 mm)			

JAPAN PULL™ SET



- SET INCLUDES:
- 1 pc Elastomer-wrapped straight handle
 - 1 pc GNB-265: 16 TPI blade
 - 1 pc GNB-250: 19 TPI blade
 - 1 pc Tri-fold canvas carrying case


ITEM CODE	BLADE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
					KERF WIDTH			
JPR-SET	GNB-265	10.4 in (265 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)	6 sets	24 sets	0-49296-11005-5
					0.04 in. (0.9 mm)			
	GNB-250	9.8 in (250 mm)	0.05 in (1.40 mm)	19 TPI	0.02 in. (0.5 mm)			
					0.03 in. (0.7 mm)			

PULL-STROKE SAWS

JAPAN PULL™ BLADES



- Premium-grade SK-95 blades
- Impulse hardened triple-edge cutting teeth

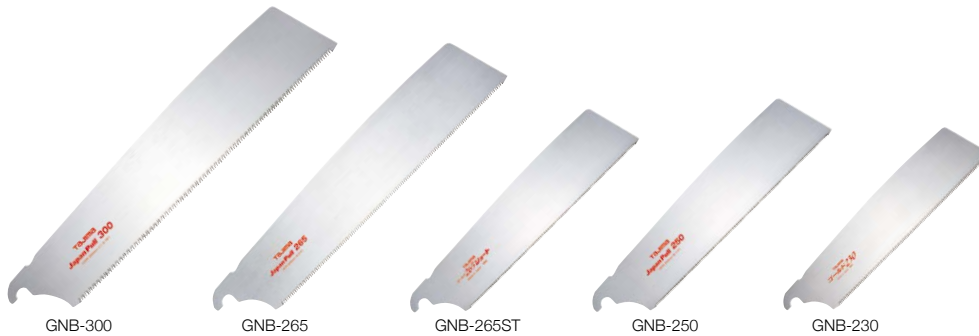

ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
GNB-300	11.8 in (300 mm)	0.08 in (2.15 mm)	13 TPI	0.03 in. (0.7 mm)	3	24	0-49296-06009-1
				0.05 in. (1.15 mm)			
GNB-265	10.4 in (265 mm)	0.07 in (1.75 mm)	16 TPI	0.02 in. (0.6 mm)			0-49296-11103-8
GNB-265ST	9.1 in (230 mm)			0.04 in. (0.9 mm)			
GNB-250	9.8 in (250 mm)	0.06 in (1.40 mm)	19 TPI	0.02 in. (0.5 mm)			0-49296-06001-5
				0.03 in. (0.7 mm)			
GNB-230	9.1 in (230 mm)	0.05 in (1.20 mm)	21 TPI	0.02 in. (0.4 mm)			0-49296-11104-5
				0.02 in. (0.55 mm)			

PULL-STROKE SAWS

JAPAN PULL™ G-SAW

All handles are interchangeable with all blades.



BLADE						MATERIAL SUITABILITY INDEX					
	CUT	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS						
					KERF WIDTH	Green Wood	Softwood	Hardwood	Composite	Aluminum	
① ALB-A240	AGGRESSIVE CUT	9.4 in (240 mm)	0.1 in (3.0 mm)	9 TPI	0.04 in. (0.9 mm)	★★	/	★★	★	★★	/
② ALB-A270		10.6 in (270 mm)			0.05 in. (1.2 mm)	★★	/	★★	★	★★	/
③ GKB-G210		8.3 in (210 mm)			0.03 in. (0.7 mm)	★★	/	★★	★	★★	/
④ GKB-G240		9.4 in (240 mm)			0.04 in. (1.0 mm)	★★	/	★★	★	★★	/

★★★ Best ★★ Better ★ Good

PULL-STROKE SAWS

ALUMINIST® G-SAW™



- Tapered 9 TPI Fluoro-Coat blades
- Die-cast aluminum handle with elastomer grip
- Available in fixed-blade with sheath or folding handle models



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
ALSA-A270	10.6 in (270 mm)	0.1 in (3.0 mm)	9 TPI	0.04 in. (0.9 mm)	4	24	0-49296-01746-0
ALOR-A240	9.4 in (240 mm)			0.05 in. (1.2 mm)			0-49296-01741-5

G-SAW™ 240 / 210



- Multi-purpose 9 TPI blades
- Folding handle
- Elastomer grip



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
GK-G240	9.4 in (240 mm)	0.1 in (3.0 mm)	9 TPI	0.03 in. (0.7 mm)	6	60	0-49296-01589-3
GK-G210	8.3 in (210 mm)			0.04 in. (1.0 mm)			0-49296-01575-6

PULL-STROKE SAWS

G-SAW™ REPLACEMENT BLADES

- Premium-grade 9 TPI tapered blades with triple edge cutting teeth
- Available with Fluoro-Coat Blade™ or standard blade coatings



ALB-A270

ALB-A240

GKB-G240

GKB-G210



ITEM CODE	BLADE LENGTH	TOOTH PITCH	TPI	BLADE THICKNESS	CASE	MASTER CARTON	UPC
				KERF WIDTH			
ALB-A270	10.6 in (270 mm)	0.1 in (3.0 mm)	9 TPI	0.04 in. (0.9 mm)	2	12	0-49296-01750-7
ALB-A240	9.4 in (240 mm)			0.05 in. (1.2 mm)			0-49296-01749-1
GKB-G240	9.4 in (240 mm)			0.03 in. (0.7 mm)	3		0-49296-01590-9
GKB-G210	8.3 in (210 mm)			0.04 in. (1.0 mm)			0-49296-01576-3

LAYOUT TOOLS



LAYOUT TOOLS



PLUMB ALIGNMENT AND CENTERING TOOLS

Quickly and easily attaches to most any surface. Setting pin for wood or drywall, strong magnet for steel surfaces, hook onto nail or studs.

PLUMB-RITE® 400GP

- All-in-one plumb alignment and centering tool
- Self-retracting line
- Elastomer-wrapped heavy-duty case
- Reinforced setting pin head
- 14 oz / 400 g quick-stabilizing bob



ITEM CODE	BOB WEIGHT	LINE LENGTH	CASE	MASTER CARTON	UPC
PZB-400GP	14 oz. / 400 g	14.8 ft (4.5 m)	6	24	0-49296-05638-4

PLUMB-RITE® 400

- All-in-one plumb alignment and centering tool
- Self-retracting line
- 14 oz / 400 g quick-stabilizing bob



ITEM CODE	BOB WEIGHT	LINE LENGTH	CASE	MASTER CARTON	UPC
PZB-400	14 oz. / 400 g	14.8 ft (4.5 m)	6	24	0-49296-05412-0

LAYOUT TOOLS

PLUMB-RITE® 300



- All-in-one plumb alignment and centering tool
- Self-retracting line
- 10 oz / 300 g quick-stabilizing bob



ITEM CODE	BOB WEIGHT	LINE LENGTH	CASE	MASTER CARTON	UPC
PZB-300	10 oz. / 300 g	10 ft (3 m)	6	24	0-49296-05506-6

PLUMB-RITE® QUICK-STABILIZING BOBS

- Quick-stabilizing bobs (within 6 seconds)



ITEM CODE	BOB WEIGHT	FEATURES	CASE	MASTER CARTON	UPC
PQB600	21 oz. / 600 g	QUICK-STABILIZING	6	24	0-49296-05426-7
PQB400	14 oz. / 400 g				0-49296-05425-0
PQB300	10 oz. / 300 g				0-49296-05424-3
PQB200	7 oz. / 200 g				0-49296-05423-6

PLUMB-RITE® BRAIDED PLUMB LINE

- Premium braided nylon/polyester line for use with Plumb-Rite layout tools




ITEM CODE	LINE LENGTH	CASE	MASTER CARTON	UPC
PC-ITOL	0.04 in (0.9 mm) x 49 ft (15 m)	10	100	0-49296-05431-1

LAYOUT TOOLS


SLANT™ SERIES

Fast and reliable tools to measure, set, or replicate a pitch or angle.

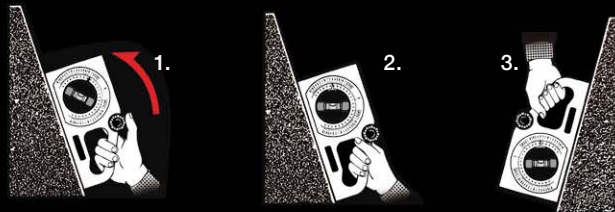

TO MEASURE AN ANGLE OR PITCH

1. Place the bottom of the pitch / angle meter flush with the surface to be measured.
2. Rotate the thumb-screw knob until the bubble in the vial is centered between the alignment lines then read the angle or pitch calibration mark at the index pointer.
3. Invert the pitch / angle meter to measure a downward slope.

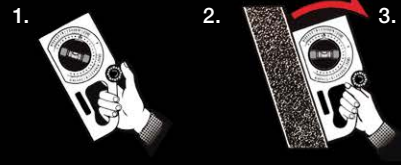

TO SET AN ANGLE OR PITCH

1. Rotate the thumb-screw knob until the index pointer is positioned at the desired angle or pitch calibration mark.
2. Place the bottom of the pitch / angle meter flush with the surface to be set.
3. Rotate together until the bubble in the vial is centered between the alignment lines.

SLANT™ AL200 / 100



SLT-AL200M



SLT-100

- Rotating dual-scale angle meter to single-handedly measure, set, or replicate a pitch or angle
- Durable aluminum frame
- Magnet on bottom allows for hands-free use with compatible surfaces



- Rotating dual-scale angle meter to single-handedly measure, set, or replicate a pitch or angle



ITEM CODE	ANGLE	ACCURACY	CASE	MASTER CARTON	UPC
SLT-AL200M	130° - 0 - 130°	±1°	6	36	0-49296-06585-0
SLT-100					0-49296-04083-3

INDEX

ITEM CODE	Page		Page		Page
A		CNV-FSP600	20, 22	GK-G240	77
AC-500B	57, 61	CNV-J900PL2	20, 25	GNB-230	71, 75
AC-501R	57, 61	CNV-J900SP	20, 25	GNB-250	71, 75
AC-521R	57, 61	CNVBSP3W550	20, 23	GNB-265	71, 75
AC-700B	56, 61	CR101S-0	10, 13	GNB-265ST	71, 75
AC-700S	56, 61	CR201R-PR	10, 13	GNB-300	71, 75
AC-701R	56, 61	CR201W-P	10, 13	GP-16BW	28, 29, 37
AC-701S	56, 61	CR202B-P	10, 13	GP-25BW	28, 29, 37
ACM-500C	57, 60	CR301JF	10, 12	GP-30BW	28, 29, 37
ACM-700C	56, 60	CR302JF	10, 12	GS-16BW	28, 29, 32
ACM-700SC	56, 60	CR401S	10, 12	GS-16/5MBW	28, 29, 32
ALB-A240	76, 78	CR402S	10, 12	GS-25BW	28, 29, 32
ALB-A270	76, 78	CR403S	10, 11	GS-25/7.5MBW	28, 29, 32
ALOR-A240	77	CR503S	10, 11	GS-C16BW	28, 29, 33
ALSA-A270	77	CR604S	10, 11	GS-C16/5MBW	28, 29, 33
AZS-ROP	36	D		GS-MC16BW	29, 34
C		DC390B	57, 59	GS-MC16/5MBW	29, 34
CB39RBH	57	DC540N	57, 59	GS-SC16BW	29, 34
CB50C	57	DC-560	57, 62	GS-SC16/5MBW	29, 34
CB50RBC	57	DC-561	57, 62	GSSF-16BW	28, 29, 33
CB65C	56	DC660N	56, 59	GSSF-16/5MBW	28, 29, 33
CB65RBC	56	DC661N	56, 59	GSSF-25BW	28, 29, 33
CNV-100LT	20, 26	DC690	56, 64	GSSF-25/7.5MBW	28, 29, 33
CNV-100PL2	20, 25	DFC560N	57, 58	GT165JS	52
CNV-100RS	20, 23	DFC561N	57, 58	GTB165JS	52
CNV-100SP	20, 25	DFC670N-R1	56, 65	H	
CNV-100SP18	20, 24	DFC671N-R1	56, 65	HKB-50B	54
CNV-100SP26	20, 24	G		HKB-5B	54
CNV-900RS	20, 23	G-16/5MBW	28, 29, 37	HL-16/5MBW	28, 29, 38
CNV-900SP18	20, 24	G-16BW	28, 29, 37	HL-16BW	28, 29, 38
CNV-900SP26	20, 24	G-25/7.5MBW	28, 29, 37	HL-25/7.5MBW	28, 29, 38
CNVBP-BN	23	G-25BW	28, 29, 37	HL-25BW	28, 29, 38
CNVBP-SN	23	G-30BW	28, 29, 37	HL-30BW	28, 29, 38
CNVBP-SP	23	G-33/10MBW	28, 29, 37	I	
CNV-DSP26	20, 21	G-5.5MBW	28, 29, 37	IR101S-0	18
CNV-FFC	22	G-6BW	28, 29, 37	J	
CNV-FSN	22	G-7.5MBW	28, 29, 37	JPR-265	74
CNV-FSNL	22	GKB-G210	76, 78	JPR-265R	73
CNV-FSP	22	GKB-G240	76, 78	JPR-265ST	73
CNV-FSP26-600	20, 22	GK-G210	77	JPR-300	74

INDEX

ITEM CODE	Page				
JPR-SET	74	LE-SF501D-SP	40, 44	PLC3-DR2700	17
L		LE-ZP3730	40, 45	PLC3-DW300	17
LC-301	57, 67	M		PLC3-DW900	17
LC-302	57, 67	M21-WAT	18	PLC3-DW2700	17
LC-303	57, 67	MG-300FB	72	PL-ITOL	10, 14
LC303-D60	67	MGB-300FB	71,72	PL-ITO3L	10, 14
LC-360	57, 63	P		PL-ITOLL	10, 14
LC-500	57, 67	PC-ITOL	81	PL-ITOS	10, 14
LC500-C40	67	PLC2-B300	17	PQB200	81
LC-501	57, 67	PLC2-B900	17	PQB300	81
LC501-A40	67	PLC2-B2700	17	PQB400	81
LC-520	57, 66	PLC2-FB300	17	PQB600	81
LC-521	57, 66	PLC2-FB900	17	PSB2-180	18
LC-560	57, 63	PLC2-FB2700	17	PS-ITOS	18
LC-561	57, 63	PLC2-FG300	17	PSS2-180	18
LC-620	56, 66	PLC2-FG900	17	PZB-300	81
LC-650	56, 66	PLC2-FG2700	17	PZB-400	80
LC-660	56, 63	PLC2-FP300	17	PZB-400GP	80
LC-661	56, 63	PLC2-FP900	17	S	
LCB-30	57	PLC2-FP2700	17	SCR-H1200	56, 68
LCB-30-50	57	PLC2-FY300	17	SCR-L200	56, 57, 68
LCB-30RB	57	PLC2-FY900	17	SCR-L300	56, 57, 68
LCB-50	57	PLC2-FY2700	17	SCR-L600	56, 57, 68
LCB-50-50	57	PLC2-R300	17	SF-BHLD	35
LCB-50D	57	PLC2-R900	17	SF-BHLD-BK	35
LCB-50RB	57	PLC2-R2700	17	SF-CHLD	35
LCB-50RB-50	57	PLC2-W300	17	SF-LOOP	36
LCB-50S	57, 68	PLC2-W900	17	SF-MHLD	36
LCB-62	56	PLC2-W2700	17	SF-MTHLD	36
LCB-65	56	PLC2-Y300	17	SF-THLD	35
LCB-65-20	56	PLC2-Y900	17	SLT-100	82
LCB-65RB	56	PLC2-Y2700	17	SLT-AL200M	82
LCB-65S	56, 68	PLC3-BK300	17	SS-10BW	28, 29, 31
LE-CL501D-SP	40, 41	PLC3-BK900	17	SS-16BW	28, 29, 31
LE-E502D-SP	40, 42	PLC3-BK2700	17	SS-16/5MBW	28, 29, 31
LE-F501D	40, 43	PLC3-DB300	17	SS-25BW	28, 29, 31
LE-F502D	40, 42	PLC3-DB900	17	SS-25/7.5BMW	28, 29, 31
LE-M501D	40, 43	PLC3-DB2700	17	SSSF-16BW	28, 29, 31
LE-SF351D	40, 45	PLC3-DR300	17	SSSF-16/5MBW	28, 29, 31
LE-SF352D	40, 45	PLC3-DR900	17	SSSF-25BW	28, 29, 31

INDEX

ITEM CODE	Page
------------------	-------------

SSSF-25/7.5MBW	28, 29, 31
----------------	------------

T

TAJ-CP10	15
----------	----

TAJ-CSDR	15
----------	----

TAJ-EH09	15
----------	----

TAJ-G009	15
----------	----

TAJ-GS09	15
----------	----

TAJ-HN09	15
----------	----

TAJ-HNDR	15
----------	----

TAJ-LL09	15
----------	----

TAJ-LS09	15
----------	----

TAJ-LSDR	15
----------	----

TAJ-NTSBTS	15
------------	----

TAJ-PTDR	15
----------	----

TAJ-SPDR	15
----------	----

TBK180-H45	47
------------	----

TBK180-V30	47
------------	----

TBY-S130C	49
-----------	----

TBY-S130S	49
-----------	----

TBY-SH180	51
-----------	----

TMK-KV45	48
----------	----

TMKB-C50	48
----------	----

TBYD-180	50
----------	----

V

VR-101R	54, 55
---------	--------

VR-102B	54, 55
---------	--------

VR-103	54, 55
--------	--------

VRB2-100B	54
-----------	----

VRB2-50B	54
----------	----

VRB2-5B	54
---------	----

memo

Tajima

Founded in 1909 as a manufacturer of steel and woven measuring tapes, TJM Design Corporation now produces over 1,000 premium-grade hand tools under the **Tajima** brand. A multinational organization with global production facilities, TJM Design Corporation continues its commitment to excellence in the design, selection of materials, production and quality control processes that govern the manufacture of its tools. And all TJM Design Corporation staff are dedicated to ensuring that the function, quality, shape and design of **Tajima** tools fulfills the desires and expectations of the end user. As a result, **Tajima** brand tools are recognized worldwide as offering exceptional feature and function at a high level of quality rarely seen in today's industry.



Tajima

TAJIMA TOOL CORPORATION

3510 Torrance Blvd., Suite 301, Torrance, CA 90503

www.tajimatool.com

For warranty info visit : www.tajimatool.com/warranty/

For general inquiry : info@tajimatool.com

© 2024 Tajima Tool Corporation



www.tajimatool.com



@tajimatoolusa



Actual products may vary in color and material from photographs.